

VL10 BEAMWASH

	TECHNICAL NOTICE
Product	VL4000 BEAMWASH
Subject	TN - 01788

OVERVIEW

Updated firmware for the following fixtures

Fixture Version

VL10 BEAMWASH VL10BW_091819

The latest software can be download from the product page or our website <u>www.VARI-LITE.com</u>

RELEASE NOTES

New Fixture feature

True follow spot mode -

- ➤ This allows the VL10 BEAMWASH to be used a follow spot. When activated it turns off the fixtures pan and tilt feedback system, it reduces holding current on motors so sensors remain active, but the fixture can be moved by hand with no motor restrictions or direction correction
- All other fixture functions will work via DMX in the same manner as a fixture not in follow spot mode.
- This mode is activated or deactivated via the UI only and will remain active in fixture until disabled or fixture is manually reset to default at the UI.
- ➤ If the setting is activated on fixture power start up calibration the fixture will calibrate as standard once in the home position the motors feedback and holding will switch to follow spot mode automatically.
- The fixtures UI Screen will show the light is in follow spot mode as the DMX address with turn blue and show the word follow spot mode shown above the DMX address
- ➤ On disabling the follow spot mode via the UI a full fixture power cycle or recalibration is required to re-engage the Pan and Tilt motors.


The follow spot mode can only be activated or deactivated via the User Interface see following page for updated user interface navigation

CONTACT INFORMATION

For more information on this technical notice or on Vari-Lite products, please contact your Authorized Vari-Lite Dealer or Vari-Lite customer service at 1.214.647.7880.



Updated user interface navigation - revised

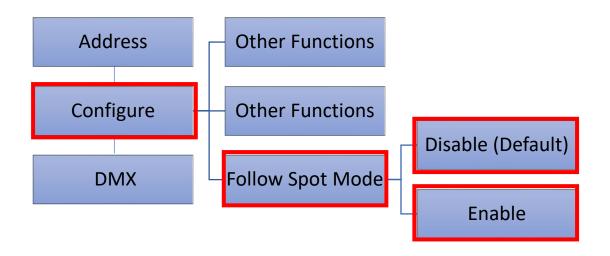

CONTACT INFORMATION

For more information on this technical notice or on Vari-Lite products, please contact your Authorized Vari-Lite Dealer or Vari-Lite customer service at 1.214.647.7880.