


# Showline

## SL STRIP 400 RGBW LED Luminaires

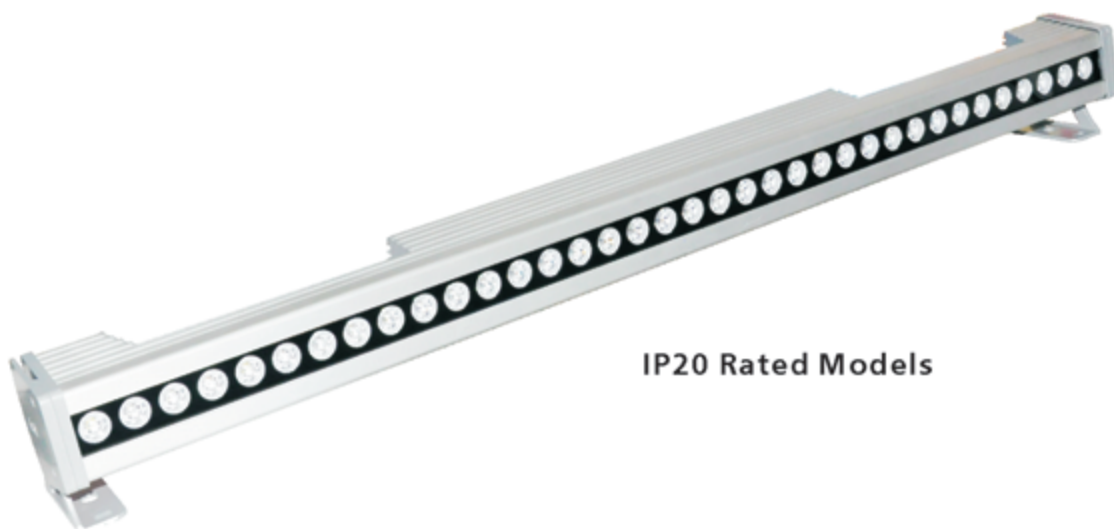

IP20 Rated Models

[www.vari-lite.com](http://www.vari-lite.com)

The material in this manual is for information purposes only and is subject to change without notice. Showline assumes no responsibility for any errors or omissions which may appear in this manual. For comments and suggestions regarding corrections and/or updates to this manual, please contact your nearest Showline office.

El contenido de este manual es solamente para información y está sujeto a cambios sin previo aviso. Showline no asume responsabilidad por errores o omisiones que puedan aparecer. Cualquier comentario, sugerencia o corrección con respecto a este manual, favor de dirigirlo a la oficina de Showline más cercana.

Der Inhalt dieses Handbuches ist nur für Informationszwecke gedacht, Änderungen sind vorbehalten. Showline uebernimmt keine Verantwortung für Fehler oder Irrtümer, die in diesem Handbuch auftreten. Für Bemerkungen und Verbesserungsvorschläge oder Vorschläge in Bezug auf Korrekturen und/oder Aktualisierungen in diesem Handbuch, moechten wir Sie bitten, Kontakt mit der naechsten Showline-Niederlassung aufzunehmen.

Le matériel décrit dans ce manuel est pour information seulement et est sujet à changements sans préavis. La compagnie Showline n'assume aucune responsabilité sur toute erreur ou omission inscrite dans ce manuel. Pour tous commentaires ou suggestions concernant des corrections et/ou les mises à jour de ce manuel, veuillez s'il vous plait contacter le bureau de Showline le plus proche.

---

**Note:** Information contained in this document may not be duplicated in full or in part by any person without prior written approval of Showline. Its sole purpose is to provide the user with conceptual information on the equipment mentioned. The use of this document for all other purposes is specifically prohibited.

---

Document Number: **SL STRIP 400 RGBW LED Luminaires Users**

Version as of: **24-004-3416-00**

SL STRIP 400 RGBW LED Luminaire Installation & User's Manual

©2013 Philips Group. All rights reserved.

# IMPORTANT INFORMATION

## Warnings and Notices

When using electrical equipment, basic safety precautions should always be followed including the following:



- a. **READ AND FOLLOW ALL SAFETY INSTRUCTIONS.**
- b. Do not use outdoors.
- c. Do not mount near gas or electric heaters.
- d. Equipment should be mounted in locations and at heights where it will not readily be subjected to tampering by unauthorized personnel.
- e. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- f. Do not use this equipment for other than intended use.
- g. Refer service to qualified personnel.

**SAVE THESE INSTRUCTIONS.**



**WARNING:** You must have access to a main circuit breaker or other power disconnect device before installing any wiring. Be sure that power is disconnected by removing fuses or turning the main circuit breaker off before installation. Installing the device with power on may expose you to dangerous voltages and damage the device. A qualified electrician must perform this installation.

**WARNING:** Refer to National Electrical Code® and local codes for cable specifications. Failure to use proper cable can result in damage to equipment or danger to personnel.

**WARNING:** This equipment is intended for installation in accordance with the National Electric Code® and local regulations. It is also intended for installation in indoor applications only. Before any electrical work is performed, disconnect power at the circuit breaker or remove the fuse to avoid shock or damage to the control. It is recommended that a qualified electrician perform this installation.

## Additional Resources for DMX512

For more information on installing DMX512 control systems, the following publication is available for purchase from the United States Institute for Theatre Technology (USITT), "Recommended Practice for DMX512: A Guide for Users and Installers, 2nd edition" (ISBN: 9780955703522). USITT Contact Information:

**USITT**  
**315 South Crouse Avenue, Suite 200**  
**Syracuse, NY 13210-1844**  
**Phone: 1.800.938.7488 or 1.315.463.6463**  
**[www.usitt.org](http://www.usitt.org)**

## Showline Limited Two-Year Warranty

Showline offers a two-year limited warranty of its luminaires against defects in materials or workmanship from the date of delivery. A copy of Showline two-year limited warranty containing specific terms and conditions can be obtained by contacting your local Showline office.

# TABLE OF CONTENTS

Showline Offices.....	Inside Front Cover
<b>IMPORTANT INFORMATION</b>	
Warnings and Notices .....	1
Additional Resources for DMX512 .....	1
Showline Limited Two-Year Warranty .....	1
<b>TABLE OF CONTENTS</b>	
<b>PREFACE</b>	
About this Manual .....	3
Included Items.....	3
SL STRIP 400 RGBW LED Luminaire Accessories .....	3
<b>SL STRIP 400 RGBW LED LUMINAIRE OVERVIEW</b>	
SL STRIP 400 RGBW LED Luminaire Components .....	4
Major Luminaire Components .....	4
LCD Display / Menu System.....	5
<b>INSTALLATION AND SET UP</b>	
Power Requirements .....	6
AC Power Operation.....	6
Connecting Power.....	6
Connecting SL STRIP 400 RGBW LED Luminaires to AC Power.....	7
Connecting to the DMX512 Network.....	8
Mounting Luminaire.....	9
<b>OPERATION AND PROGRAMMING</b>	
LCD Display and Menu System .....	11
LCD Display and Menu System Operation .....	11
Quick Selection Buttons .....	13
Edit a Preset Button .....	13
Edit a Chase Button .....	13
DMX Address Button .....	13
Dimming Curve Selection .....	14
Master / Slave Operational Mode .....	15
<b>DMX CONTROL</b>	
16-Bit Mode.....	16
8-Bit Mode.....	18
HSIC Mode .....	21
SL STRIP 400 RGBW LED Luminaire DMX Timing Channel Detail .....	22
SL STRIP 400 RGBW LED Luminaire RDM Parameter IDs .....	27
<b>CLEANING AND CARE</b>	
Special Cleaning and Care Instructions .....	31
Front Lens Cleaning.....	31
Service and Maintenance .....	31
<b>TECHNICAL SPECIFICATIONS</b>	
SL STRIP 400 RGBW LED Luminaire Operational Specifications .....	32
SL STRIP 400 RGBW LED Luminaire Dimensions .....	32

# PREFACE

## 1. About this Manual

The document provides installation and operation instructions for the following products:

- SL STRIP 400 RGBW LED Luminaire (IP20 rated)

Please read all instructions before installing or using this product. *Retain this manual for future reference.* Additional product information and descriptions may be found on the product specification sheet.

**Note:** The SL STRIP 400 RGBW LED Luminaire is universal voltage 100 to 240 VAC (auto-ranging).

## 2. Included Items



Each SL STRIP 400 RGBW LED Luminaire includes the following items:

- SL STRIP 400 RGBW LED Luminaire
- Installation and User's Manual (*this document*)


## 3. SL STRIP 400 RGBW LED Luminaire Accessories

Part Number	Description
MC	Mega Claw, Black, Anodized
SC	Molded Yoke C-Clamp
HC	Light Weight Half Coupler
82003	Safety Cable

# SL STRIP 400 RGBW LED LUMINAIRE OVERVIEW

## 1. SL STRIP 400 RGBW LED Luminaire Components


### Major Luminaire Components

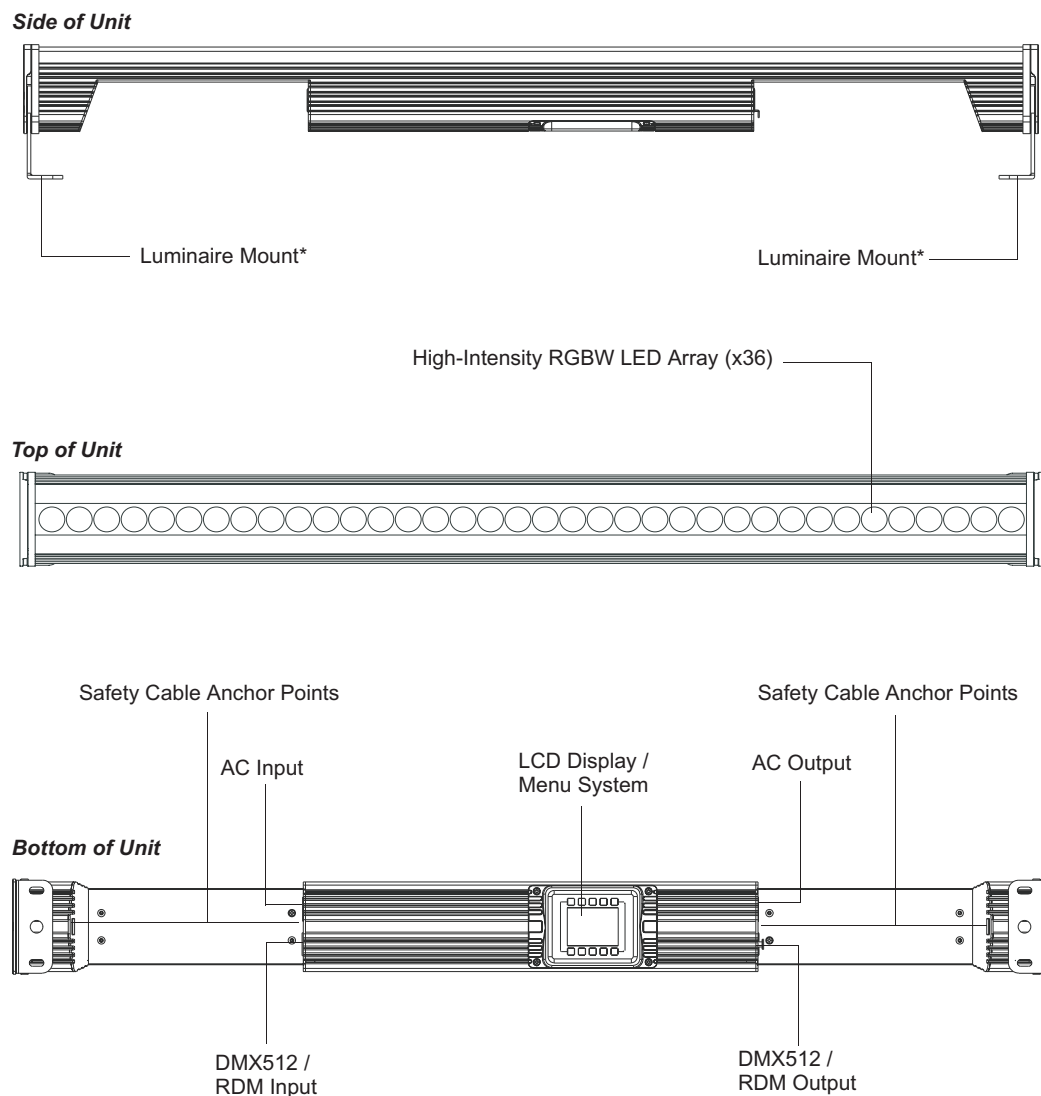

**Figure 1: SL STRIP 400 RGBW LED Luminaire Components**

**Note:** \*Mounts can be removed and reversed. See "[Mounting Luminaire](#)" on page 9 for more information.

## LCD Display / Menu System

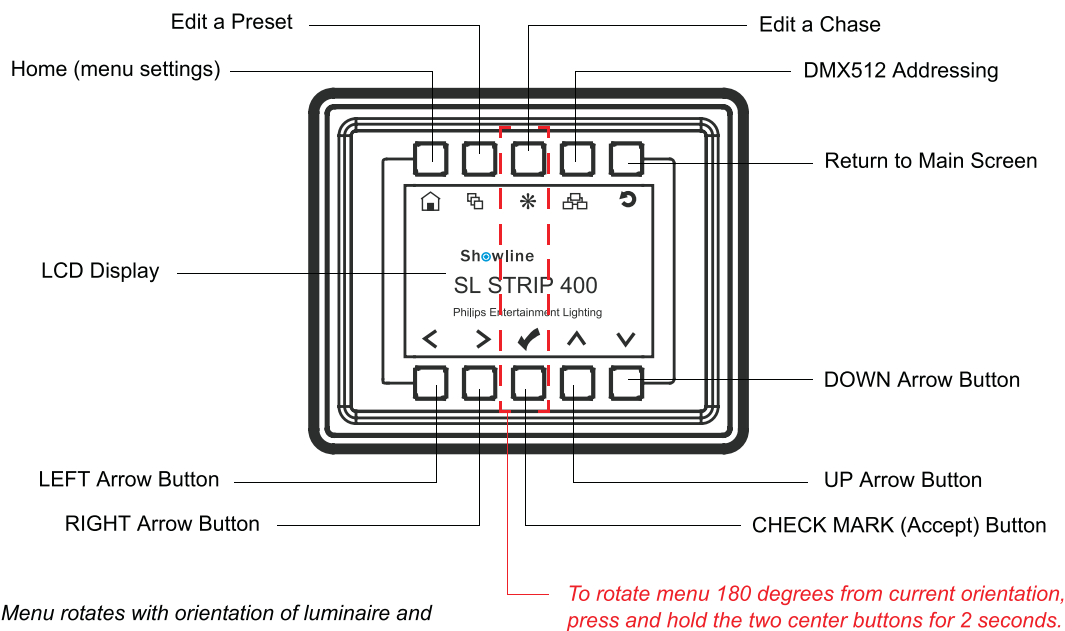

**Figure 2: LCD Display & Menu System**

**Note:** For Menu operation and programming details, refer to "LCD Display and Menu System" on page 11

# INSTALLATION AND SET UP

## 1. Power Requirements

The SL STRIP 400 RGBW LED Luminaire operates on AC input voltages from 100 to 240 VAC.



**WARNING!** This unit does not contain an ON/OFF switch. Always disconnect power input cable to completely remove power from unit when not in use.

### AC Power Operation

When connected to an AC source, the unit operates on 100 to 240 volts AC (+/- 10%, auto-ranging). The luminaire contains an auto-ranging power supply. Each luminaire can draw up to 95 Watts.



**WARNING!** Maximum amount of units that may be daisy-chained is (A) 17 units 100 ~ 120VAC or (B) 32 units 230 ~ 240VAC (10 Amps).

**Table 1: SL STRIP 400 RGBW LED Luminaire Voltage (VAC) vs. Current\***

Voltage (AC)	Total Current (A)	Voltage (AC)	Total Current (A)
100	0.95	180	0.53
110	0.86	190	0.50
120	0.79	200	0.48
130	0.73	210	0.45
140	0.67	220	0.43
150	0.63	230	0.41
160	0.59	240	0.40
170	0.56		

**Note:** For wiring of AC input connector, refer to "[Connecting SL STRIP 400 RGBW LED Luminaires to AC Power](#)" on page 7.

## 2. Connecting Power

Units can be powered in one of two ways:

- Direct connection to a AC power source using an AC input cable. For wiring of AC input connector, refer to "[Connecting SL STRIP 400 RGBW LED Luminaires to AC Power](#)" on page 7.
- Connection from the AC output of another SL STRIP 400 RGBW LED Luminaire. When using this method, it is very important not to connect any other type of equipment device.



**WARNING!** Only connect other SL STRIP 400 RGBW LED Luminaires to the AC Output (Thru) connector of a SL STRIP 400 RGBW LED Luminaire.




## Connecting SL STRIP 400 RGBW LED Luminaires to AC Power

The unit is supplied with an AC input cable without an input connector. Input connector is a user-supplied accessory to fit your application.

Table 2 describes how to connect power to your SL STRIP 400 RGBW LED Luminaire. Field wiring of the SL STRIP 400 RGBW LED Luminaire is straight forward. A total of 3 wires/conductors is supplied from the unit. The following wiring scheme is used:

**Table 2:** SL STRIP 400 RGBW LED Luminaire (IP20 Rated Models) AC Input Connections

Wire Color	Purpose
Brown	Main / Line (100 to 240VAC)
Blue	Neutral
Green/Yellow	Ground (Earth)

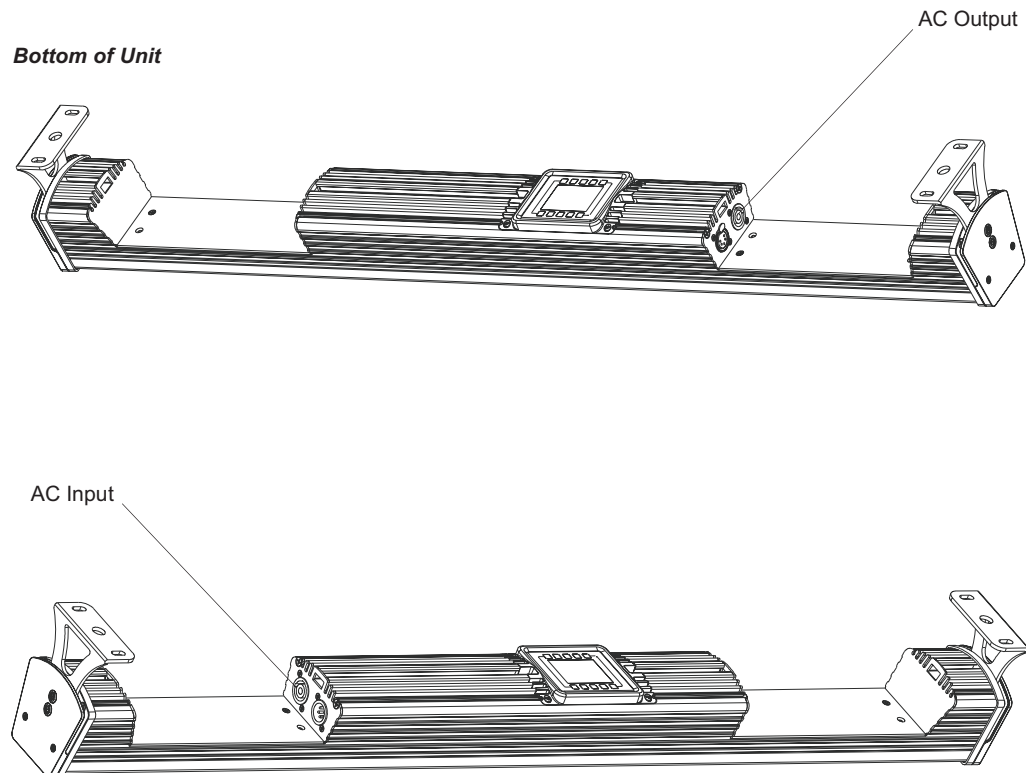


**Figure 3:** SL STRIP 400 RGBW LED Luminaire AC Input & Output Connections

**CAUTION:** In the event the AC input cable of this luminaire is damaged, it must be replaced with an approved cable through an Authorized Showline Dealer or Service Center.


### 3. Connecting to the DMX512 Network

Basic DMX512 installation consists of connecting multiple SL STRIP 400 RGBW LED Luminaires together (up to 32 luminaires) in "daisy-chain" fashion. A cable runs from the control console (or DMX512 control source) to the DMX connector on the first SL STRIP 400 RGBW LED Luminaire. Another cable runs from the other DMX connector on the first unit to a DMX connector on the next SL STRIP 400 RGBW LED Luminaire (or DMX512 device to be controlled).

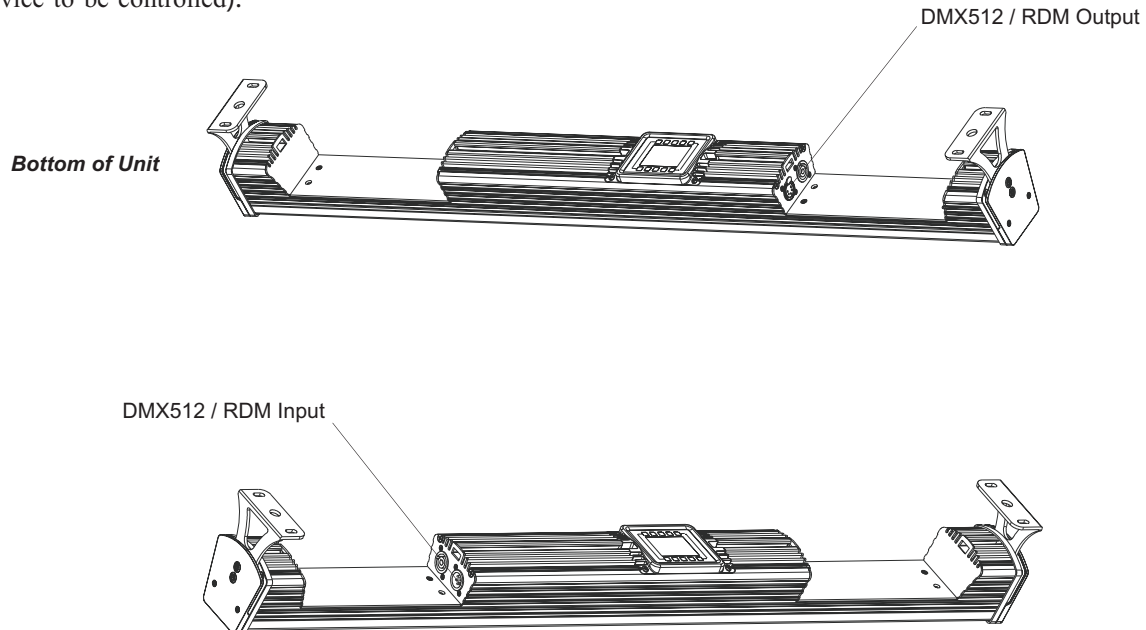

**Figure 4: SL STRIP 400 RGBW LED Luminaire DMX512 Input / Output Connections**

**Note:** For more information on DMX512 networking and systems, refer to ["Additional Resources for DMX512"](#) on page 1. For SL STRIP 400 RGBW LED Luminaire DMX Mapping, refer to ["DMX CONTROL"](#) on page 17.

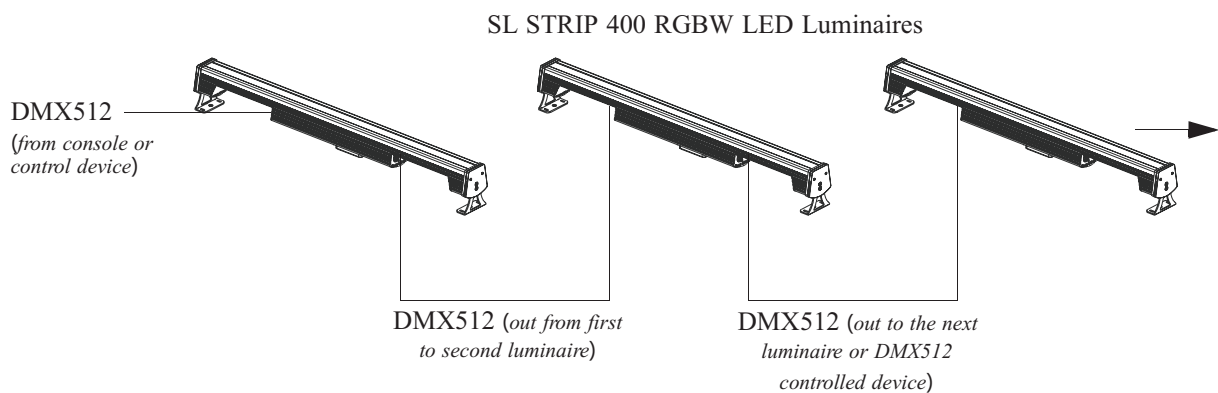

DMX512 Connections	
DMX512 Signal	XLR Pin
Common (Drain)	1
DMX512 -	2
DMX512 +	3

Note: Remaining pins on each connector are not used.


**Figure 5: SL STRIP 400 RGBW LED Luminaire - DMX512 Connections**

## 4. Mounting Luminaire

The SL STRIP 400 RGBW LED Luminaire is provided with two mounts and multiple safety cable anchor points (as described in "Major Luminaire Components" on page 4 and **Figure 7 on page 10.**)

The two mounts are easily removed and reversed as required (as illustrated in **Figure 6**). These mounts are designed to accept a variety of mounting hooks, clamps, etc. for hanging applications or can be set on the mounts for floor applications. Refer to **Figure 7** for additional information.


(\* Per Side)

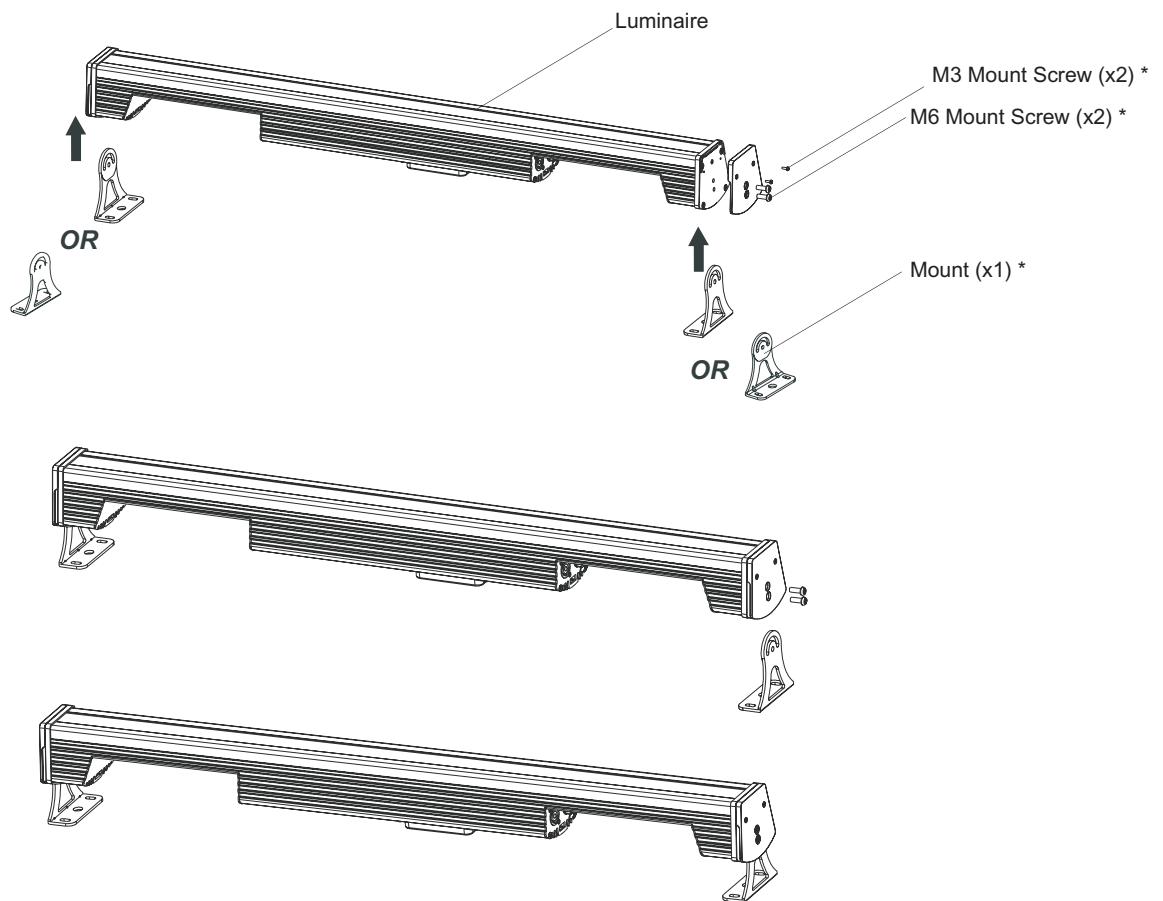

**Figure 6: Mount Removal and Installation**

Simply attach hook, clamp, etc. to the SL STRIP 400 RGBW LED Luminaire mount assembly in the M10 hole.

**Note:** Mounting hooks, clamps, etc. are sold separately or by others. For available mounting accessories refer to "SL STRIP 400 RGBW LED Luminaire Accessories" on page 3.

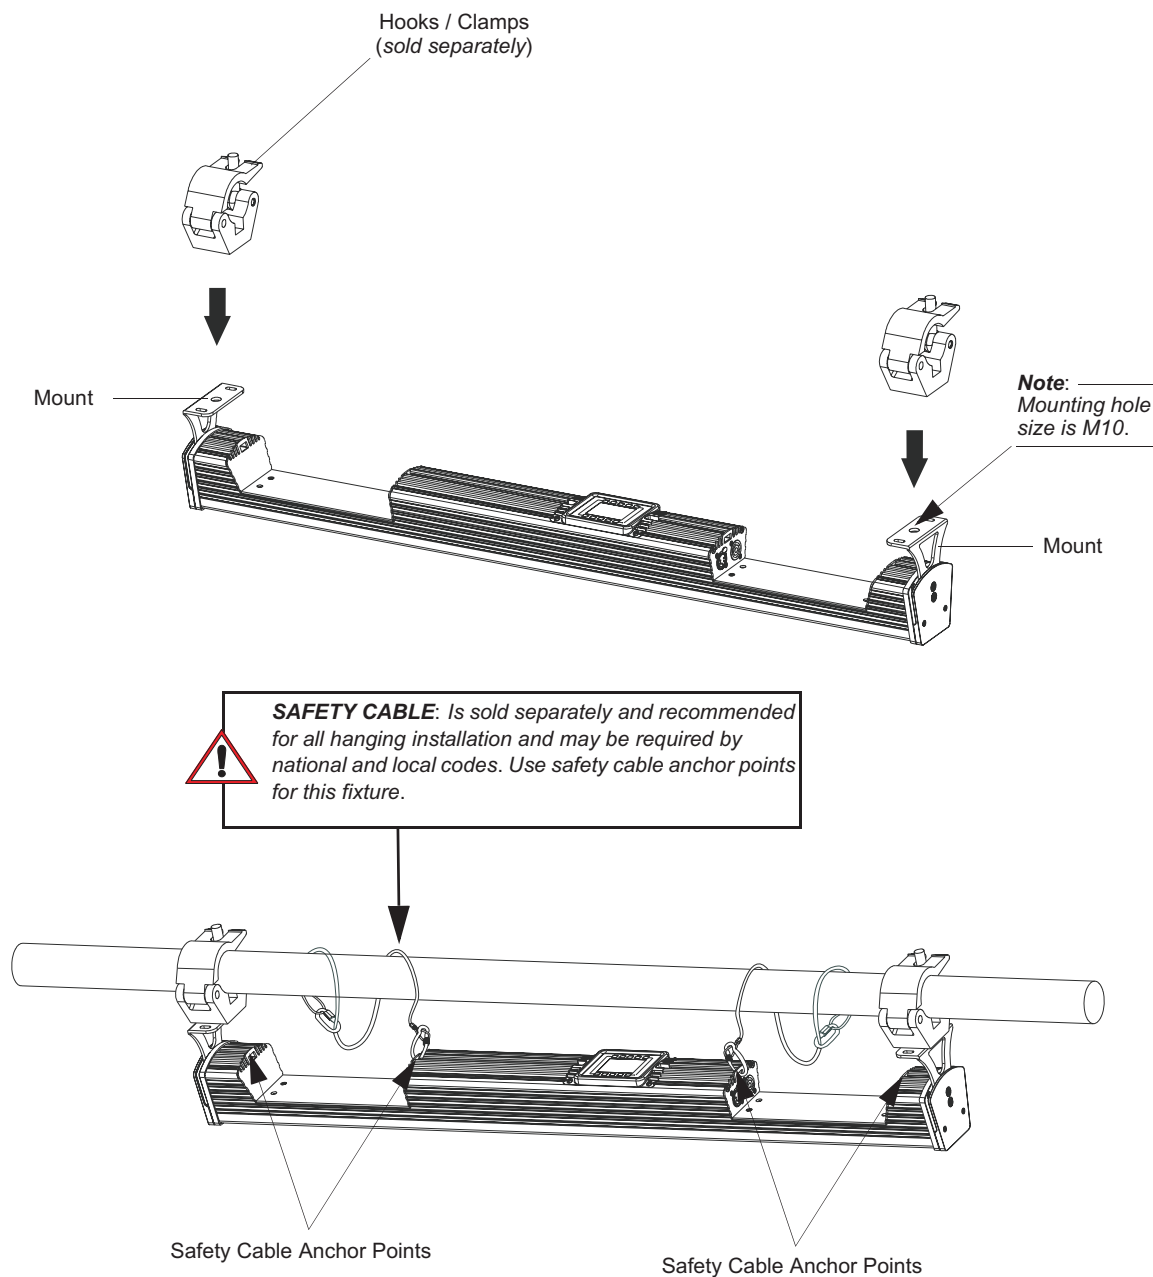

**Figure 7: Mounting Luminaire - Hanging Applications**

# OPERATION AND PROGRAMMING


## 1. LCD Display and Menu System

The SL STRIP 400 RGBW LED Luminaire LCD Display and Menu System provides local control for accessing the following fixture settings:

- Presets (Standard and User Defined)
- Color Filters
- Effects (Chases - preloaded and user defined)
- Strobe / Timing
- Fixture Settings
- Fixture Lockout (to prevent changes)
- Password Setting
- Current Fixture Operational Status
- Setting the DMX512 Address

**Note:** If there are multiple luminaires in a system, changes would need to be made at each LCD Menu as desired.

Upon power up, the LCD will display the main screen showing the product type/name. If DMX is enabled, the programmed address will appear after power up.

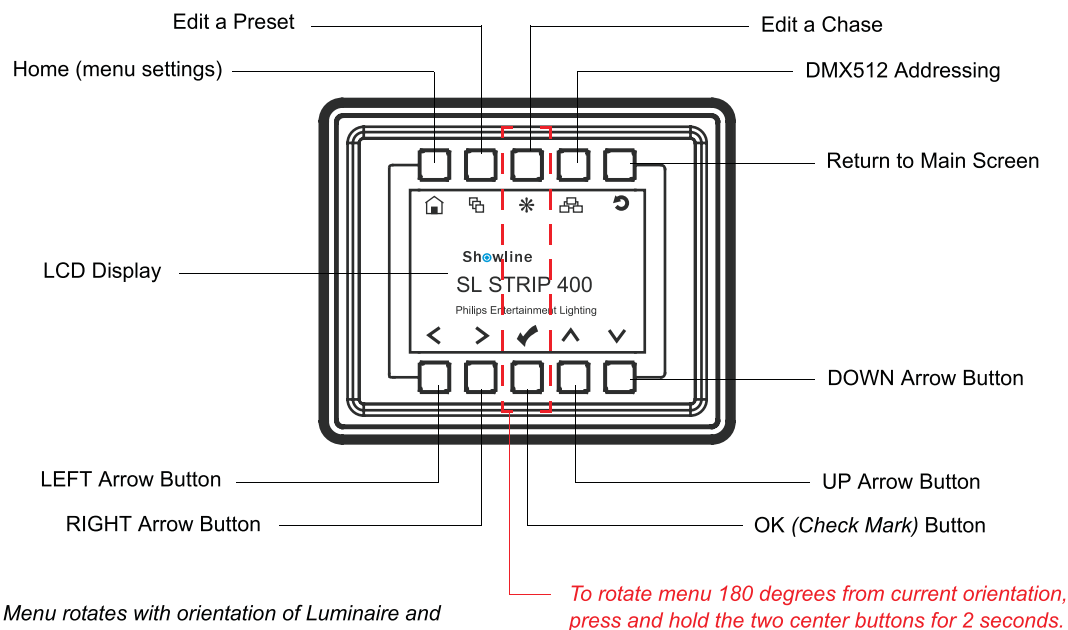

**NOTE:** Menu rotates with orientation of Luminaire and menu buttons are always in the same position (with rotation of menu)

Figure 8: LCD Display and Menu System

## 2. LCD Display and Menu System Operation

The LCD Display Menu system consists of several categories. Use the Menu Buttons to access and make changes to the menu items. When the desired menu item is reached, press the desired Menu Button to display the menu options and to navigate and configure the menu options as required.

### To navigate and access menu settings/selections:

- Step 1. Make sure unit is powered and turned on.
- Step 2. Press the desired button (as shown in **Figure 8 on page 11**) to access menu categories.
- Step 3. Use UP | DOWN | LEFT | RIGHT arrow buttons to navigate through the various options and settings.
- Step 4. Make changes as desired.
- Step 5. Press CHECK MARK (OK) button to accept changes.

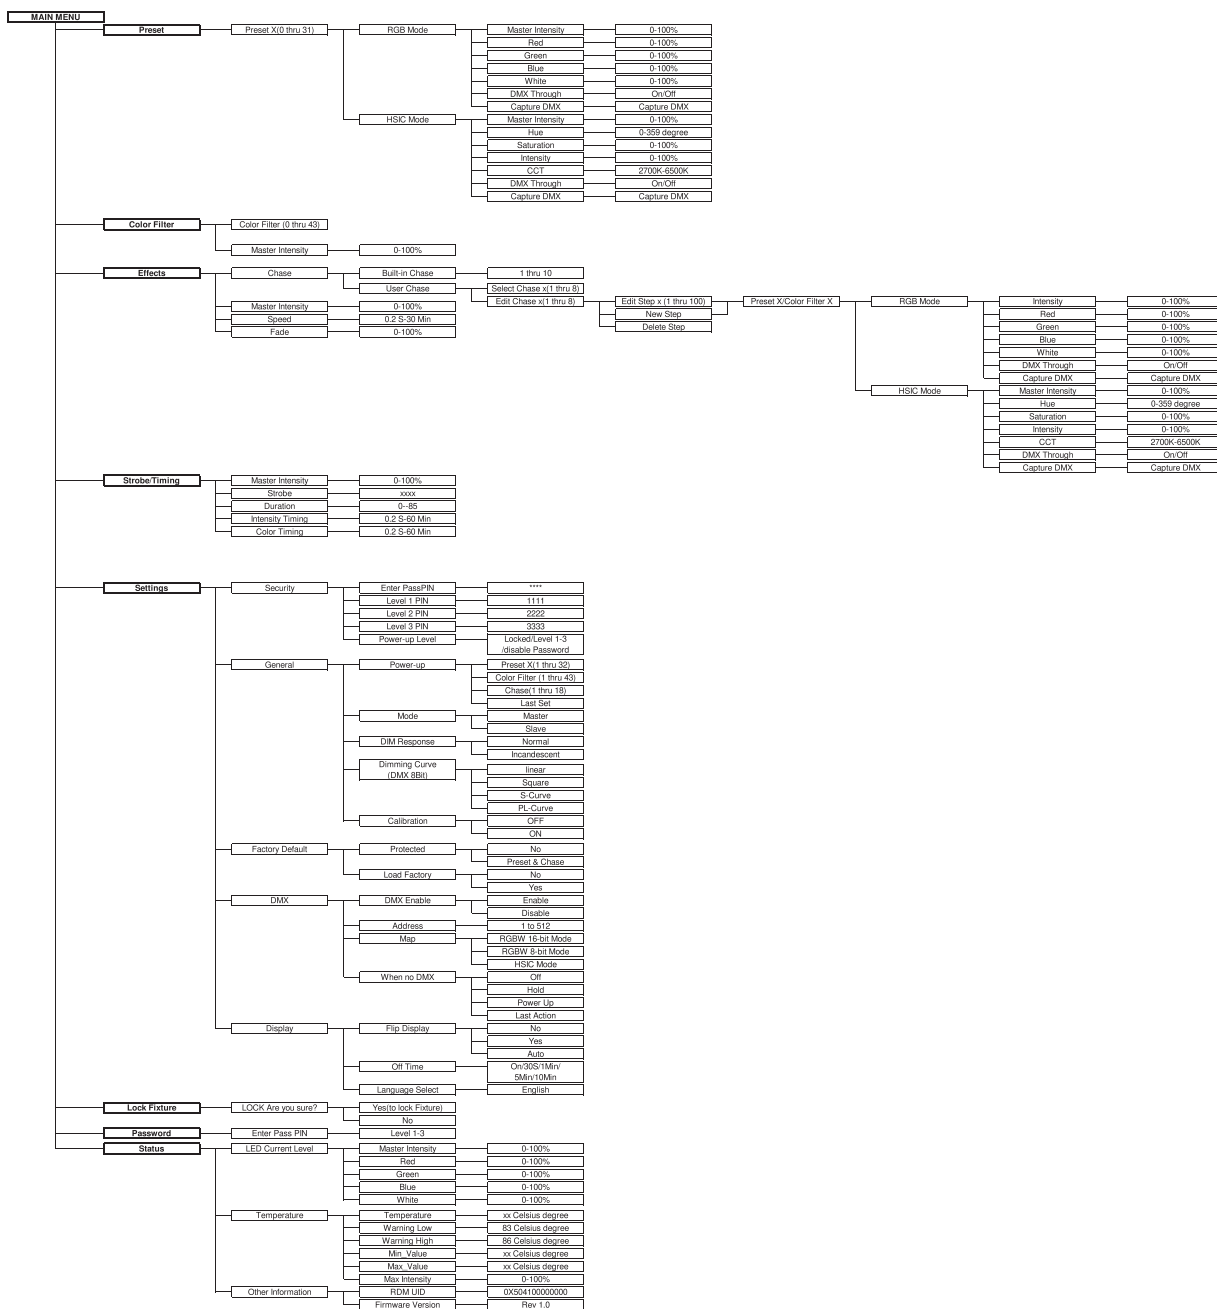


Figure 9: SL STRIP 400 RGBW LED Luminaire Menu Tree

### 3. Quick Selection Buttons

When in Manual Mode, the SL STRIP 400 RGBW LED Luminaire's features can be accessed via the on-board LCD menu system or via three quick select buttons:


- Edit a Preset Button
- Edit a Chase Button
- DMX Address Button

#### Edit a Preset Button

##### To edit and save a preset:

- Step 1. Press Edit a Preset button. Current preset will be shown.
- Step 2. Use LEFT and RIGHT arrow buttons to scroll through all presets.
- Step 3. Once at desired preset, use UP and DOWN arrows to access (highlight) preset parameters. Once in desired parameter, use LEFT and RIGHT arrow buttons to adjust parameter value as desired.
- Step 4. Once all values are adjusted as desired, press OK (Check Mark) button.
- Step 5. Save preset menu option will appear. Use LEFT and RIGHT arrow buttons to select preset number.
- Step 6. If saving preset, press OK (Check Mark) button. Confirm choice.
- Step 7. Preset is now saved.

Edit a Preset




#### Edit a Chase Button

##### To edit and save a chase:

- Step 1. Press Edit a Chase button. Current chase will be shown.
- Step 2. Use LEFT and RIGHT arrow buttons to scroll through all chases (Built In and User Chases).

Edit a Chase



**Note:** For Built In Chases, only the Speed and Fade parameters may be changed and saved. For User Chases, Chase Number, Total Steps, Speed, and Fade Parameters may be changed and saved.

- Step 3. Once at desired chase, use UP and DOWN arrows to access (highlight) chase parameters. Once in desired parameter, use LEFT and RIGHT arrow buttons to adjust parameter value as desired.
- Step 4. Once all values are adjusted as desired, press OK (Check Mark) button.
- Step 5. Save chase menu option will appear. Use LEFT and RIGHT arrow buttons to select chase number.
- Step 6. If saving chase, press OK (Check Mark) button. Confirm choice.
- Step 7. Chase is now saved.

#### DMX Address Button

##### To edit and save a DMX address:

- Step 1. Press DMX Address button. Current DMX Address will be shown.
- Step 2. Press OK (Check Mark) button to highlight a digit in the DMX address.
- Step 3. Use LEFT and RIGHT arrow buttons to scroll through all digits.
- Step 4. Once at desired digit, use UP and DOWN arrows to change highlighted digit. Once digit is set, use LEFT and RIGHT arrow buttons to set other digits in DMX address.
- Step 5. Once all digits are set in DMX address, press OK (Check Mark) button.
- Step 6. DMX will display and is saved.


DMX Address



## 4. Dimming Curve Selection

Through the menu, you are able to select one of four dimming curves:

- Linear Curve
- PL\_Curve
- S\_Curve
- Square Curve

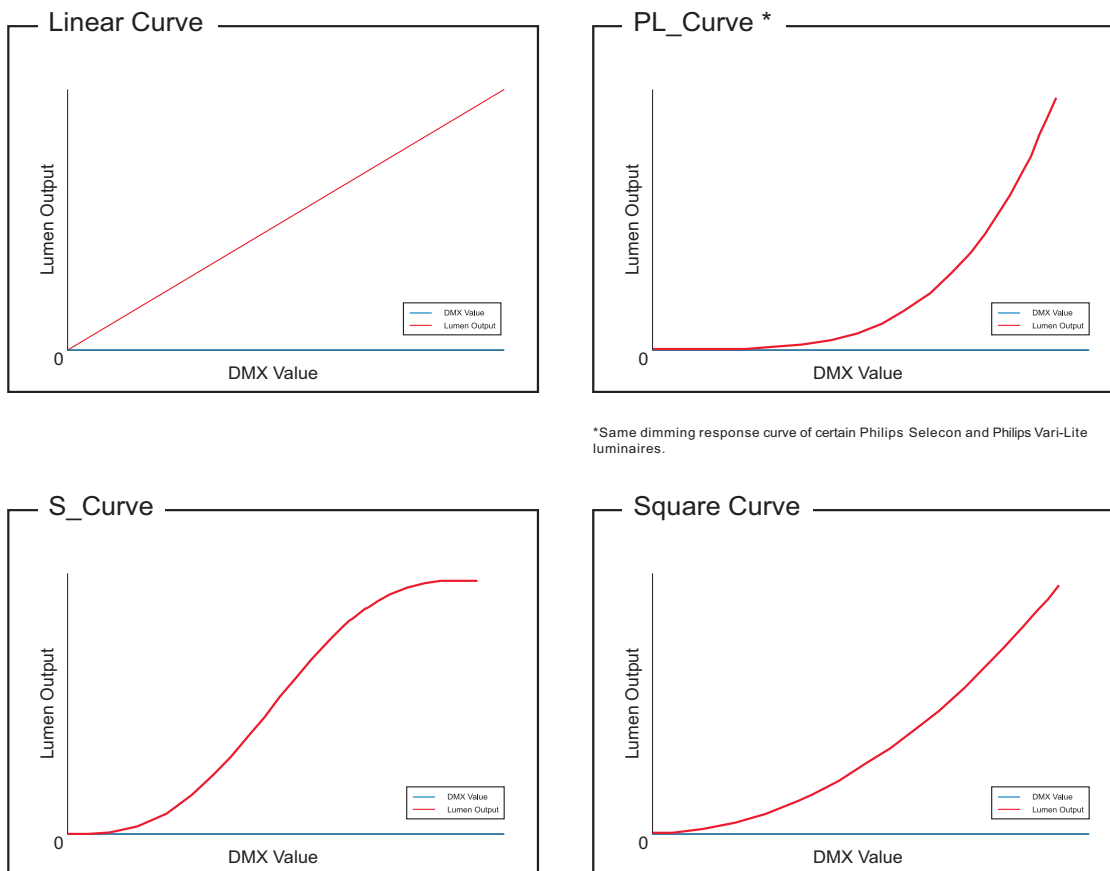

**Figure 10: SL STRIP 400 RGBW LED Luminaire Dimmer Curves**



## 5. Master / Slave Operational Mode

The Master / Slave Operational Mode allows one SL STRIP 400 RGBW LED Luminaire to act as the "Master" unit and all other connected units are controlled by this unit. When a unit is set to "Slave" mode, it will only listen to and follow any commands sent from a "Master" unit. Only one "Master" unit is allowed in this type of operation.

### To setup a master / slave network:

- Step 1. Set the first device in the DMX512 chain to **Master Mode** through the unit's menu system.
- Step 2. Set all other connected units to **Slave Mode**.
- Step 3. The master unit can be controlled via DMX512, RDM or through standalone operation (self-contained network utilizing on-board effects). The slave units will mimic the master unit's operation in all cases.

**Note:** For more information on DMX512 networking and systems, refer to ["Additional Resources for DMX512" on page 1](#). For SL STRIP 400 RGBW LED Luminaire DMX Mapping, refer to ["DMX CONTROL" on page 16](#).

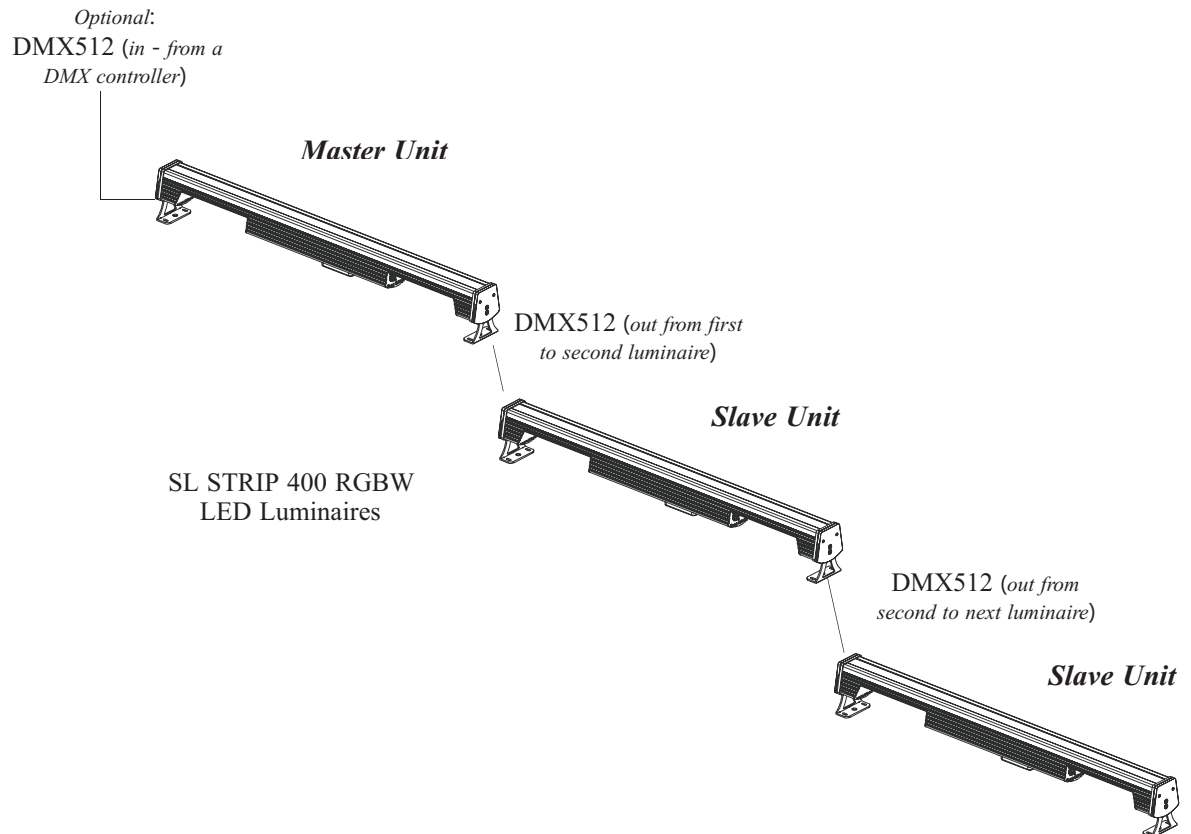


Figure 11: SL STRIP 400 RGBW LED Luminaire - Master / Slave Configuration

## DMX CONTROL

This section contains information for operating the luminaire using DMX control in 16-bit, 8-Bit, or HSIC (Hue, Saturation, Intensity and Color Correction) modes. For Menu options and detailed information, see ["LCD Display and Menu System" on page.11](#)

**Note:** These tables assume a DMX start address of 1. When a different starting address is used, this address becomes channel 1 function and other functions follow in sequence.

### 1. 16-Bit Mode

Table 3 provides DMX channel mapping of all DMX512 control values when the SL STRIP 400 RGBW LED Luminaire is in 16-bit DMX512 mode (as set by the luminaire menu system).

**Table 3: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (16-Bit Mode)**

DMX Channel	Parameter	Range DMX	Range%	Default - recommended console default values	Description
1 2	Master Intensity - High Master Intensity - Low	0 - 65535	0 - 100%	DMX 0	16 bit control for Intensity of LED settings.
3	Color Presets	0 - 255	0 - 100%	0	Variable color Presets as follows . . .  Channel OFF (disabled)    DMX 0 - 4 Preset 0 (OFF)                DMX 5 - 6 Preset 1                        DMX 7 - 8 Preset 2                        DMX 9 - 10 Preset 3                        DMX 11 - 12 Preset 4                        DMX 13 - 14 Preset 5                        DMX 15 - 16 Preset 6                        DMX 17 - 18 Preset 7                        DMX 19 - 20 Preset 8                        DMX 21 - 22 Preset 9                        DMX 23 - 24 Preset 10                        DMX 25 - 26 Preset 11                        DMX 27 - 28 Preset 12                        DMX 29 - 30 Preset 13                        DMX 31 - 32 Preset 14                        DMX 33 - 34 Preset 15                        DMX 35 - 36 Preset 16                        DMX 37 - 38 Preset 17                        DMX 39 - 40 Preset 18                        DMX 41 - 42 Preset 19                        DMX 43 - 44 Preset 20                        DMX 45 - 46 Preset 21                        DMX 47 - 48 Preset 22                        DMX 49 - 50 Preset 23                        DMX 51 - 52 Preset 24                        DMX 53 - 54 Preset 25                        DMX 55 - 56 Preset 26                        DMX 57 - 58 Preset 27                        DMX 59 - 60 Preset 28                        DMX 61 - 62 Preset 29                        DMX 63- 64 Preset 30                        DMX 65- 66 Preset 31                        DMX 67- 68 CF_0_Color OFF                DMX 69 - 70

**Table 3: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (16-Bit Mode)**

3	Color Presets	0 - 255	0 - 100%	0	<i>Select presets, variable color filters or chases as follows:</i>
					CF_1_White 10000K DMX71 - 72
					CF_2_White 8000K DMX73 - 74
					CF_3_White 6500K DMX75 - 76
					CF_4_White 5600K DMX77 - 78
					CF_5_White 5000K DMX79 - 80
					CF_6_White 4500K DMX81 - 82
					CF_7_White 4000K DMX83 - 84
					CF_8_White 3200K DMX85 - 86
					CF_9_White 3000K DMX87 - 88
					CF_10_White 2700K DMX89 - 90
					CF_11_Moroccan Pink DMX91 - 92
					CF_12_Pink DMX93 - 94
					CF_13_Flesh Pink DMX95 - 96
					CF_14_Bright Rose DMX97 - 98
					CF_15_Follies Pink DMX99 - 100
					CF_16_Fuchsia Pink DMX101 - 102
					CF_17_Surprise Pink DMX103 - 104
					CF_18_Congo Blue DMX105 - 106
					CF_19_Blue DMX107 - 108
					CF_20_Virgin Blue DMX109 - 110
					CF_21_Midnight Maya DMX111 - 112
					CF_22_Dubler C.T Blue DMX113 - 114
					CF_23_Slate Blue DMX115 - 116
					CF_24_RegalBlue DMX117 - 118
					CF_25_Fullt C.T Blue DMX119 - 120
					CF_26_Steel Blue DMX121 - 122
					CF_27_Lighter Blue DMX123 - 124
					CF_28_Cyan DMX125 - 126
					CF_29_Marine Blue DMX127 - 128
					CF_30_Soft Green DMX129 - 130
					CF_31_Moss Green DMX131 - 132
					CF_32_Green DMX133 - 134
					CF_33_Fem Green DMX135 - 136
					CF_34_JAS Green DMX137 - 138
					CF_35_Pale Green DMX139 - 140
					CF_36_Spring Yellow DMX141 - 142
					CF_37_Yellow DMX143 - 144
					CF_38_Deep Amber DMX145 - 146
					CF_39_Chrome Orange DMX147 - 148
					CF_40_Orange DMX149 - 150
					CF_41_Magenta DMX151 - 152
					CF_42_Flame Red DMX153 - 154
					CF_43_Purple DMX155 - 156
					Rotate CW Fast to Slow DMX157 - 171
					Rotate ACW Slow to Fast DMX172 - 186
					Random Color Fast to Slow DMX187 - 201
					Chase1 DMX 202 - 204
					Chase2 DMX 205 - 207
					Chase3 DMX 208 - 210
					Chase4 DMX 211 - 213
					Chase5 DMX 214 - 216
					Chase6 DMX 217 - 219
					Chase7 DMX 220 - 222
					Chase8 DMX 223 - 225
					Chase9 DMX 226 - 228
					Chase10 DMX 229 - 231
					User Chase1 DMX 232 - 234
					User Chase2 DMX 235 - 237
					User Chase3 DMX 238 - 240
					User Chase4 DMX 241 - 243
					User Chase5 DMX 244 - 246
					User Chase6 DMX 247 - 249
					User Chase7 DMX 250 - 252
					User Chase8 DMX 253 - 255

**Table 3: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (16-Bit Mode)**

4	Strobe	0 - 255	0 - 100%	0	Controls strobe operations as follows: Open = DMX 0 - 2 Closed = DMX 3 - 5 Slow Rand = DMX 6 - 7 Med Rand = DMX 8 - 10 Fast Rand = DMX 11 - 12 Strobe Range = DMX 13 - 127 (fastest) Pulse + Slow Rand = DMX 128 - 129 Pulse + Med Rand = DMX 130 - 131 Pulse + Fast Rand = DMX 132 - 133 Pulse + Range = DMX 134 - 191 Pulse - Slow Rand = DMX 192 - 193 Pulse - Med Rand = DMX 194 - 195 Pulse - Fast Rand = DMX 196 - 197 Pulse - Range = DMX 198 - 255
5	Duration	0 - 255	0 - 100%	0	Strobe Duration is 0 - 85 0 = DMX 0 1 = DMX 1 - 3 x = (DMX Value-1)/3+1 85 = DMX 253-255
6	Intensity Timing	0 - 255	0 - 100%	255	Allows for timing control of intensity. Channel should default to 255 for smoothest actions using console and/or manual fades.
7	Color Timing	0 - 255	0 - 100%	255	Allows for timing control of colors. Channel should default to 255 for smoothest actions using console and/or manual fades.
8	Control	0 - 255	0 - 100%	255	functions of the SL Series products. Set control channel value to desired action, Hold value for at least 5 seconds, then turn to 0. Set control channel value to 0 without any scaling. Default Setting on Console = DMX 0-4 DIM Response_Normal = DMX 5 - 9 DIM Response_Incandescent = DMX 10 - 14 Dimming Curve_linear = DMX 30 - 34 Dimming Curve_Square = DMX 35- 39 Dimming Curve_S-Curve = DMX 40 - 44 Dimming Curve_PL-Curve = DMX 45 - 49 Calibration_OFF = DMX 70 - 74 Calibration_ON = DMX 75 -79 Reserves( Future use) = DMX 80 - 250
9 10	Red - High Byte Red - Low Byte	0 - 65535	0 - 100%	DMX 0	16 bit control of Red LEDs from 0 to full.
11 12	Green - High Byte Green - Low Byte	0 - 65535	0 - 100%	DMX 0	16 bit control of Green LEDs from 0 to full.
13 14	Blue - High Byte Blue - Low Byte	0 - 65535	0 - 100%	DMX 0	16 bit control of Blue LEDs from 0 to full.
15 16	White - High Byte White - Low Byte	0 - 65535	0 - 100%	DMX 0	16 bit control of White LEDs from 0 to full.

## 2. 8-Bit Mode

Table 4 provides DMX channel mapping of all DMX512 control values when the SL STRIP 400 RGBW LED Luminaire is in 8-bit DMX512 mode (as set by the luminaire menu system).

**Table 4: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (8-Bit Mode)**

DMX Channel	Parameter	Range DMX	Range%	Default - recommended console default values	Description
1	Master Intensity	0 - 255	0 - 100%	0	8-bit control for Intensity of LED settings.

Table 4: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (8-Bit Mode)

2	Color Presets	0 - 255	0 - 100%	0	<i>Select presets, variable color filters or chases as follows:</i>	
					Channel OFF (disabled)	DMX 0 - 4
					Preset 0 (OFF)	DMX 5 - 6
					Preset 1	DMX 7 - 8
					Preset 2	DMX 9 - 10
					Preset 3	DMX 11 - 12
					Preset 4	DMX 13 - 14
					Preset 5	DMX 15 - 16
					Preset 6	DMX 17 - 18
					Preset 7	DMX 19 - 20
					Preset 8	DMX 21 - 22
					Preset 9	DMX 23 - 24
					Preset 10	DMX 25 - 26
					Preset 11	DMX 27 - 28
					Preset 12	DMX 29 - 30
					Preset 13	DMX 31 - 32
					Preset 14	DMX 33 - 34
					Preset 15	DMX 35 - 36
					Preset 16	DMX 37 - 38
					Preset 17	DMX 39 - 40
					Preset 18	DMX 41 - 42
					Preset 19	DMX 43 - 44
					Preset 20	DMX 45 - 46
					Preset 21	DMX 47 - 48
					Preset 22	DMX 49 - 50
					Preset 23	DMX 51 - 52
					Preset 24	DMX 53 - 54
					Preset 25	DMX 55 - 56
					Preset 26	DMX 57 - 58
					Preset 27	DMX 59 - 60
					Preset 28	DMX 61 - 62
					Preset 29	DMX 63 - 64
					Preset 30	DMX 65 - 66
					Preset 31	DMX 67 - 68
					CF_0_Color OFF	DMX 69 - 70
					CF_1_White 10000K	DMX 71 - 72
					CF_2_White 8000K	DMX 73 - 74
					CF_3_White 6500K	DMX 75 - 76
					CF_4_White 5600K	DMX 77 - 78
					CF_5_White 5000K	DMX 79 - 80
					CF_6_White 4500K	DMX 81 - 82
					CF_7_White 4000K	DMX 83 - 84
					CF_8_White 3200K	DMX 85 - 86
					CF_9_White 3000K	DMX 87 - 88
					CF_10_White 2700K	DMX 89 - 90

Table 4: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (8-Bit Mode)

2	Color Presets	0 - 255	0 - 100%	0	Select presets, variable color filters or chases as follows:
					CF_11_Moroccan PinkDMX91 - 92
					CF_12_PinkDMX93 - 94
					CF_13_Flesh PinkDMX95 - 96
					CF_14_Bright RoseDMX97 - 98
					CF_15_Follies PinkDMX99 - 100
					CF_16_Fuchsia PinkDMX101 - 102
					CF_17_Surprise PinkDMX103- 104
					CF_18_Congo BlueDMX105 - 106
					CF_19_BlueDMX107 - 108
					CF_20_Virgin BlueDMX109 - 110
					CF_21_Midnight MayaDMX111 - 112
					CF_22_Dluble C.T BlueDMX113 - 114
					CF_23_Slate BlueDMX115 - 116
					CF_24_RegalBlueDMX117 - 118
					CF_25_Fullt C.T BlueDMX119 - 120
					CF_26_Steel BlueDMX121 - 122
					CF_27_Lighter BlueDMX123 - 124
					CF_28_CyanDMX125 - 126
					CF_29_Marine BlueDMX127 - 128
					CF_30_Soft GreenDMX129 - 130
					CF_31_Moss GreenDMX131 - 132
					CF_32_GreenDMX133 - 134
					CF_33_Fem GreenDMX135 - 136
					CF_34_JAS GreenDMX137 - 138
					CF_35_Pale GreenDMX139 - 140
					CF_36_Spring YellowDMX141 - 142
					CF_37_YellowDMX143 - 144
					CF_38_Deep AmberDMX145 - 146
					CF_39_Chrome OrangeDMX147 - 148
					CF_40_OrangeDMX149 - 150
					CF_41_MagentaDMX151 - 152
					CF_42_Flame RedDMX153 - 154
					CF_43_PurpleDMX155 - 156
					Rotate CW Fast to SlowDMX157 - 171
					Rotate ACW Slow to FastDMX172 - 186
					Random Color Fast to SlowDMX187 - 201
					Chase 1DMX 202 - 204
					Chase 2DMX 205 - 207
					Chase 3DMX 208 - 210
					Chase 4DMX 211 - 213
					Chase 5DMX 214 - 216
					Chase 6DMX 217 - 219
					Chase 7DMX 220 - 222
					Chase 8DMX 223 - 225
					Chase 9DMX 226 - 228
					Chase 10DMX 229 - 231
User Chase 1DMX 232 - 234					
User Chase 2DMX 235 - 237					
User Chase 3DMX 238 - 240					
User Chase 4DMX 241 - 243					
User Chase 5DMX 244 - 246					
User Chase 6DMX 247 - 249					
User Chase 7DMX 250 - 252					
User Chase 8DMX 253 - 255					
3	Strobe	0 - 255	0 - 100%	0	Controls strobe operations as follows:
					Open = DMX 0 - 2
					Closed = DMX 3 - 5
					Slow Rand = DMX 6 - 7
					Med Rand = DMX 8 - 10
					Fast Rand = DMX 11 - 12
					Strobe Range = DMX 13 - 127 (fastest)
					Pulse + Slow Rand = DMX 128 - 129
					Pulse + Med Rand = DMX 130 - 131
					Pulse + Fast Rand = DMX 132 - 133
					Pulse + Range = DMX 134 - 191
					Pulse - Slow Rand = DMX 192 - 193
					Pulse - Med Rand = DMX 194 - 195
Pulse - Fast Rand = DMX 196 - 197					
Pulse - Range = DMX 198 - 255					
4	Duration	0 - 255	0 - 100%	0	Strobe Duration is 0 - 85
					0 = DMX 0
					1 = DMX 1 - 3
					x = (DMX Value-1)/3+1
85 = DMX 253-255					

**Table 4: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (8-Bit Mode)**

5	Timing	0 - 255	0 - 100%	0	Allows for timing control of intensity and color parameters. Channel should default to 255 for smoothest actions using console and/or manual fades.
6	Control	0 - 255	0 - 100%	0	functions of the SL Series products. Set control channel value to desired action, Hold value for at least 5 seconds, then turn to 0. Set control channel value to 0 without any scaling. Default Setting on Console = DMX 0-4 DIM Response_Normal = DMX 5 - 9 DIM Response_Incandescent = DMX 10 - 14 Dimming Curve_linear = DMX 30 - 34 Dimming Curve_Square = DMX 35- 39 Dimming Curve_S-Curve = DMX 40 - 44 Dimming Curve_PL-Curve = DMX 45 - 49 Calibration_OFF = DMX 70 - 74 Calibration_ON = DMX 75 -79 Reserves( Future use) = DMX 80 - 250
7	Red	0 - 255	0 - 100%	0	8 bit control of Red LEDs from 0 to full.
8	Green	0 - 255	0 - 100%	0	8 bit control of Green LEDs from 0 to full.
9	Blue	0 - 255	0 - 100%	0	8 bit control of Blue LEDs from 0 to full.
10	White	0 - 255	0 - 100%	0	8 bit control of White LEDs from 0 to full.

### 3. HSIC Mode

Table 5 provides DMX channel mapping of all DMX512 control values when the SL STRIP 400 RGBW LED Luminaire is in HSIC (Hue, Saturation, Intensity, and Color Correction) DMX512 mode (as set by the luminaire menu system).

**Table 5: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (HSIC Mode)**

DMX	Parameter	Range DMX	Range %	Defaults*	Description
1	Master Intensity	0 - 255	0 - 100%	DMX 0	8 bit control for Intensity of LED settings.
2	Strobe	0 - 255	0 - 100%	DMX 0	Controls strobe operations as follows . . . Open = DMX 0 - 2 Closed = DMX 3 - 5 Slow Rand = DMX 6 - 7 Med Rand = DMX 8 - 10 Fast Rand = DMX 11 - 12 Strobe Range = DMX 13 - 127 (fastest) Pulse + Slow Rand = DMX 128 - 129 Pulse + Med Rand = DMX 130 - 131 Pulse + Fast Rand = DMX 132 - 133 Pulse + Range = DMX 134 - 191 Pulse - Slow Rand = DMX 192 - 193 Pulse - Med Rand = DMX 194 - 195 Pulse - Fast Rand = DMX 196 - 197 Pulse - Range = DMX 198 - 255
3	Duration	0 - 255	0 - 100%	0	Strobe duration, Range is 0-85 0 = DMX 0 1 = DMX 1 - 3 x = (DMX Value-1)/3+1 85 = DMX 253-255
4	Timing	0 - 255	0 - 100%	255	Allows for timing control of intensity, color, and zoom parameters. Channel should default to 255 for smoothest actions using console and/or manual fades. - See Timing Chart for more details.

**Table 5: SL STRIP 400 RGBW LED Luminaire DMX Channel Mapping (HSIC Mode)**

5	Control	0 - 255	0 - 100%	0	Please refer to the control channel detail define. functions of the SL Series products. Set control channel value to desired action. Hold value for at least 5 seconds, then turn to 0. Set control channel value to 0 without any scaling. Default Setting on Console = DMX 0-4 DIM Response _Normal = DMX 5 - 9 DIM Response _Incandescent = DMX 10 - 14 Dimming Curve _linear = DMX 30 - 34 Dimming Curve _Square = DMX 35- 39 Dimming Curve _S-Curve = DMX 40 - 44 Dimming Curve _PL-Curve = DMX 45 - 49 Calibration _OFF = DMX 70 - 74 Calibration _ON = DMX 75 -79 Reserves( Future use) = DMX 80 - 250
6	Hue - High Byte	0 - 65535	0 - 100%	DMX 0	16 bit control of Hue 0 - 359°
7	Hue - Low Byte				
8	Saturation	0 - 255	0 - 100%	DMX 0	8 bit control of Saturation.
9	Intensity	0 - 255	0 - 100%	DMX 0	8 bit control of Intensity.
10	CCT	0 - 255	0 - 100%	DMX 0	Variable control of correlated color temperature from Channel OFF (disabled) DMX 0 - 5 2700K - 6500K. DMX 6 - 255

## 4. SL STRIP 400 RGBW LED Luminaire DMX Timing Channel Detail

Timing channel control improves the timed moves of certain groups of parameters. The SL STRIP 400 RGBW LED Luminaire provides timing channels in 16-bit mode (one for intensity time and one for color time) and one timing channel in 8-bit (color and intensity timing combined). The luminaire uses its timing channel value to calculate a smooth continuous operation for a given time and transition.

### Guidelines:

- Timing channels support time values from zero to 60 minutes.
- To use a timing channel instead of console timing, it is recommended to set the timing channel to the desired value and set cue and/or console cue fade time to zero. A combination of time controls can produce unexpected results.
- The default value setting in the profile should be 255 (proportional control) to allow smooth operation when using console timing.
- The timing channel data should change as a snap. A zero value will give the fastest operation, however, without any smoothing this can appear "steppy" in console timed moves.

Refer to "[SL STRIP 400 RGBW LED Luminaire DMX Timing Channel Detail](#)" for more information.

**Table 6: SL STRIP 400 RGBW LED Luminaire Timing Channel Detail**

% Value	DMX	= Seconds (unless noted)
0	0	0 (Full Speed)
	1	0.2
	2	0.4
1	3	0.6
	4	0.8
2	5	1
	6	1.2
	7	1.4
3	8	1.6
	9	1.8
4	10	2
	11	2.2
	12	2.4
5	13	2.6
	14	2.8
6	15	3
	16	3.2
	17	3.4



Table 6: SL STRIP 400 RGBW LED Luminaire Timing Channel Detail

% Value	DMX	= Seconds (unless noted)
7	18	3.6
	19	3.8
8	20	4
	21	4.2
	22	4.4
9	23	4.6
	24	4.8
10	25	5
	26	5.2
	27	5.4
11	28	5.6
	29	5.8
	30	6
12	31	6.2
	32	6.4
13	33	6.6
	34	6.8
	35	7.0
14	36	7.2
	37	7.4
15	38	7.6
	39	7.8
	40	8
16	41	8.2
	42	8.4
17	43	8.6
	44	8.8
	45	9
18	46	9.2
	47	9.4
19	48	9.6
	49	9.8
	50	10
20	51	10.2
	52	10.4
	53	10.6
21	54	10.8
	55	11
22	56	11.2
	57	11.4
	58	11.6
23	59	11.8
	60	12
24	61	12.2
	62	12.4
	63	12.6
25	64	12.8
	65	13
26	66	13.2
	67	13.4
	68	13.6

Table 6: SL STRIP 400 RGBW LED Luminaire Timing Channel Detail

% Value	DMX	= Seconds (unless noted)
27	69	13.8
	70	14
28	71	14.2
	72	14.4
	73	14.6
29	74	14.8
	75	15
30	76	15.2
	77	15.4
	78	15.6
31	79	15.8
	80	16
	81	16.2
32	82	16.4
	83	16.6
33	84	16.8
	85	17
	86	17.2
34	87	17.4
	88	17.6
35	89	17.8
	90	18
	91	18.2
36	92	18.4
	93	18.6
37	94	18.8
	95	19
	96	19.2
38	97	19.4
	98	19.6
39	99	19.8
	100	20
	101	21
40	102	22
	103	23
	104	24
41	105	25
	106	26
42	107	27
	108	28
	109	29
43	110	30
	111	31
44	112	32
	113	33
	114	34
45	115	35
	116	36
46	117	37
	118	38
	119	39

Table 6: SL STRIP 400 RGBW LED Luminaire Timing Channel Detail

% Value	DMX	= Seconds (unless noted)
47	100	40
	121	41
48	122	42
	123	43
	124	44
49	125	45
	126	46
	127	47
50	128	48
	129	49
51	130	50
	131	51
	132	52
52	133	53
	134	54
53	135	55
	136	56
	137	57
54	138	58
	139	59
55	140	60
	141	61
	142	62
56	143	63
	144	64
57	145	65
	146	66
	147	67
58	148	68
	149	69
59	150	70
	151	71
	152	72
60	153	73
	154	74
	155	75
61	156	76
	157	77
62	158	78
	159	79
	160	80
63	161	81
	162	82
64	163	83
	164	84
	165	85
65	166	86
	167	87
66	168	88
	169	89
	170	90

Table 6: SL STRIP 400 RGBW LED Luminaire Timing Channel Detail

% Value	DMX	= Seconds (unless noted)
67	171	91
	172	92
68	173	93
	174	94
	175	95
69	176	96
	177	97
	178	98
70	179	99
	180	100
71	181	101
	182	102
	183	103
72	184	104
	185	105
73	186	106
	187	107
	188	108
74	189	109
	190	110
75	191	111
	192	112
	193	113
76	194	114
	195	115
77	196	116
	197	117
	198	118
78	199	119
	200	120
79	201	121
	202	122
	203	123
80	204	124
	205	125
81	206	126
	207	127
	208	128
82	209	129
	210	130
	211	131
83	212	132
	213	133
84	214	134
	215	135
	216	136
85	217	137
	218	138
86	219	139
	220	140
	221	141

Table 6: SL STRIP 400 RGBW LED Luminaire Timing Channel Detail

% Value	DMX	= Seconds (unless noted)
87	222	142
	223	143
88	224	144
	225	145
	226	146
89	227	147
	228	148
	229	149
90	230	150
	231	151
91	232	152
	233	153
	234	154
92	235	155
	236	156
93	237	157
	238	158
	239	159
94	240	160
	241	161
95	242	162
	243	163
	244	164
96	245	165
	246	5 Minutes
97	247	15 Minutes
	248	30 Minutes
	249	60 Minutes
98	250*	60mS
	251*	80mS
99	252*	100mS
	253*	100mS
	254*	140mS
100	255* (default)	160mS

**Note:** \* DMX values 250 to 255 provide smoothing when using console fade timing. DMX value 255 (recommended default) will provide the smoothest timing.

## 5. SL STRIP 400 RGBW LED Luminaire RDM Parameter IDs

The following tables outline and describe all the RDM parameters IDs associated with SL STRIP 400 RGBW LED Luminaires.

- Table 7, “SL STRIP 400 RGBW LED Luminaire RDM Product Parameters IDs,” on page 28”
- Table 8, “SL STRIP 400 RGBW LED Luminaire RDM UID,” on page 28”
- Table 9, “SL STRIP 400 RGBW LED Luminaire RDM Parameters IDs,” on page 28
- Table 10, “SL STRIP 400 RGBW LED Luminaire RDM Manufacturer Status IDs,” on page 30

- Table 11, “SL STRIP 400 RGBW LED Luminaire RDM Manufacturer Specific PIDs,” on page 30

**Table 7: SL STRIP 400 RGBW LED Luminaire RDM Product Parameters Ids**

Model ID	Manufacturer	Model Description	Product Category
0x1100	Philips Entertain. Lighting Asia	SL STRIP 400 (RGBW)	0x0509

**Table 8: SL STRIP 400 RGBW LED Luminaire RDM UID**

UID					
MSB of ESTA 50H	LSB of ESTA 41H	1st of Unique Seq.	2nd of Unique Seq.	3rd of Unique Seq.	4th of Unique Seq.

**Table 9: SL STRIP 400 RGBW LED Luminaire RDM Parameters Ids**

Get Allowed	Set Allowed	RDM Parameter IDs	Value	Comment	Implemented
<b>Category - Network Management</b>					
		DISC_UNIQUE_BRANCH	0x0001		■
		DISC_MUTE	0x0002		■
		DISC_UN_MUTE	0x0003		■
■		PROXIED_DEVICES	0x0010		
■		PROXIED_DEVICES_COUNT	0x0011		
■	■	COMMS_STATUS	0x0015		
<b>Category - Status Collection</b>					
■		QUEUED_MESSAGE	0x0020		■
■		STATUS_MESSAGES	0x0030		■
■		STATUS_ID_DESCRIPTION	0x0031		■
	■	CLEAR_STATUS_ID	0x0032		■
■	■	SUB_DEVICE_STATUS_REPORT_THRESHOLD	0x0033		
<b>Category - RDM Information</b>					
■		SUPPORTED_PARAMETERS	0x0050	Support required only if supporting Parameters beyond the minimum required set.	■
■		PARAMETER_DESCRIPTION	0x0051	Support required for Manufacturer-Specific PIDs exposed in SUPPORTED_PARAMETERS message.	■
<b>Category - Product Information</b>					
■		DEVICE_INFO	0x0060		■
■		PRODUCT_DETAIL_ID_LIST	0x0070		
■		DEVICE_MODEL_DESCRIPTION	0x0080		■
■		MANUFACTURER_LABEL	0x0081		■
■	■	DEVICE_LABEL	0x0082		■
■	■	FACTORY_DEFAULTS	0x0090		■
■		LANGUAGE_CAPABILITIES	0x00A0		
■	■	LANGUAGE	0x00B0		
■		SOFTWARE_VERSION_LABEL	0x00C0		■
■		BOOT_SOFTWARE_VERSION_ID	0x00C1		

Table 9: SL STRIP 400 RGBW LED Luminaire RDM Parameters IDs

Get Allowed	Set Allowed	RDM Parameter IDs	Value	Comment	Implemented
■		BOOT_SOFTWARE_VERSION_LABEL	0x00C2		
<b>Category - DMX512 Setup</b>					
■	■	DMX_PERSONALITY	0x00E0		■
■		DMX_PERSONALITY_DESCRIPTION	0x00E1		■
■	■	DMX_START_ADDRESS	0x00F0	Required if device uses a DMX Slot	■
■		SLOT_INFO	0x0120		■
■		SLOT_DESCRIPTION	0x0121		■
■		DEFAULT_SLOT_VALUE	0x0122		
<b>Category - Sensors 0x02xx</b>					
■		SENSOR_DEFINITION	0x0200		■
■	■	SENSOR_VALUE	0x0201		■
	■	RECORD_SENSORS	0x0202		
<b>Category - Dimmer Settings 0x03xx - FUTURE USE</b>					
<b>Category - Power / Lamp Settings 0x04xx</b>					
■	■	DEVICE_HOURS	0x0400		
■	■	LAMP_HOURS	0x0401		
■	■	LAMP_STRIKES	0x0402		
■	■	LAMP_STATE	0x0403		
■	■	LAMP_ON_MODE	0x0404		
■	■	DEVICE_POWER_CYCLES	0x0405		
<b>Category - Display Settings 0x05xx</b>					
■	■	DISPLAY_INVERT	0x0500		■
■	■	DISPLAY_LEVEL	0x0501		
<b>Category - Configuration 0x06xx</b>					
■	■	PAN_INVERT	0x0600		
■	■	TILT_INVERT	0x0601		
■	■	PAN_TILT_SWAP	0x0602		
■	■	REAL_TIME_CLOCK	0x0603		
<b>Category - Control 0x10xx</b>					
■	■	IDENTIFY_DEVICE	0x1000		■
	■	RESET_DEVICE	0x1001		
■	■	POWER_STATE	0x1010		
■	■	PERFORM_SELFTEST	0x1020		
■		SELF_TEST_DESCRIPTION	0x1021		
	■	CAPTURE_PRESET	0x1030		
■	■	PRESET_PLAYBACK	0x1031		

Table 10: SL STRIP 400 RGBW LED Luminaire RDM Manufacturer Status IDs

Manufacturer Specific messages are in the range of 0x8000 - 0xFFDF. Each Manufacturer-specific Status ID shall have a unique meaning, which shall be consistent across all products having a given Manufacturer ID. See Table B-2, ANSI E1.20-2010.				
Status ID Message	Value	Data Value 1	Data Value 2	Status ID Description
8100H		00H	00H	ALL OK

Table 11: SL STRIP 400 RGBW LED Luminaire RDM Manufacturer Specific PIDs

Get Allowed	Set Allowed	RDM Parameter IDs	Type	Length	Unit	Prefix	Min	Max	Default	Description
<i>Category - Manufacturer Defined PIDs - Range is 0x8000-0xffdf (See ANSI E1.20-2010 Standard, Table A-3)</i>										
■	■	8A00H	U8	1	None	None	0	100	100	DIMMER
■	■	8A04H	U8	1	None	None	0	100	100	Dimmer RED
■	■	8A05H	U8	1	None	None	0	100	100	Dimmer GREEN
■	■	8A06H	U8	1	None	None	0	100	100	Dimmer BLUE
■	■	8A07H	U8	1	None	None	0	100	100	Dimmer WHITE
■	■	8AB2H	U8	1	None	None	1	18	1	Chase
■	■	8AB0H	U8	1	None	None	0	43	0	Color Filter
■	■	8AB1H	U8	1	None	None	0	31	0	Preset
■	■	8A92H	U8	1	None	None	0	255	0	Strobe
■	■	8A94H	U8	1	None	None	0	255	0	Duration
■	■	8AC0H	U8	1	None	None	0	255	255	Intensity Timing
■	■	8AC2H	U8	1	None	None	0	255	255	Color Timing
■	■	8A40H	U8	1	None	None	0	1	0	Link Mode
■	■	8A42H	U8	1	None	None	0	1	0	Incandescent Effect
■	■	8AA1H	U8	1	None	None	0	3	0	Dimming Curve
■	■	8A0CH	U8	1	None	None	0	3	0	DMX Fail Mode
■	■	8AA0H	U8	1	None	None	0	4	0	Backlight Off Time
■	■	8AA2H	U8	1	None	None	0	94	0	Power Up Setup
■	■	8A44H	U8	1	None	None	0	1	0	Calibration ON/OFF Setup
■	■	8A41H	U8	1	None	None	0	1	0	Lock Fixture



# CLEANING AND CARE



**WARNING!** All cleaning should be performed with power completely removed from the luminaire. Never remove protective covers when luminaire is powered. Wear appropriate protective eye wear and gloves when cleaning the fixture. All service and maintenance, other than described herein, should be performed by a qualified technician or Authorized Service Center.

## 1. Special Cleaning and Care Instructions

Being a solid-state fixture, and unlike most fixtures, the SL STRIP 400 RGBW LED Luminaire requires very little routine maintenance by the user. This section covers portions of the luminaire that can be removed for cleaning.

The SL STRIP 400 RGBW LED Luminaire special care when it comes to cleaning front lens assembly. Additional care needs to be taken with the plastic components because they are much easier to scratch or damage than glass.

The following is a list of cleaning materials required to care for your SL STRIP 400 RGBW LED Luminaire:

- Lint free lens tissue
- Lint or powder free gloves
- Reagent grade isopropyl alcohol\*
- A mild soap solution.

**Note:** \*Reagent grade isopropyl alcohol is good to use on the SL STRIP 400 RGBW LED Luminaire plastic optics with anti-reflection coatings.

If the lens is still dirty after using isopropyl alcohol, for instance if fingerprints or oil is just redistributed and not cleaned off the optic, then a mild soap and water solution can be used to gently wash the lens. Repeat the cleaning with isopropyl alcohol to eliminate streaks and soap residue.



**WARNING!** Under no circumstances should ammonia-based cleaners, acetone, or other harsh solvents be used on or near the SL STRIP 400 RGBW LED Luminaire. These types of cleaners or solvents can permanently damage the optics or housings of the fixture.

If you have any questions regarding the use or care of your SL STRIP 400 RGBW LED Luminaire, please contact Showline technical support or your local Authorized Dealer.

## 2. Front Lens Cleaning

**To clean the front lens:**

- Step 1. Disconnect luminaire from power and allow to cool completely.
- Step 2. Apply a small amount of reagent grade isopropyl alcohol to lint-free lens tissue.
- Step 3. Wipe all debris, dirt, fingerprints, etc. from lens.
- Step 4. Using a second lint-free lens tissue, wipe off any alcohol residue.

## 3. Service and Maintenance

For all other service and maintenance issues, please contact your local Showline office or an Authorized Service Center.



**WARNING!** Disassembly (other than as described herein), alterations, unauthorized service, etc. will void the product warranty. Contact your local Showline office or an Authorized Service Center for technical support and service.


## TECHNICAL SPECIFICATIONS

### 1. SL STRIP 400 RGBW LED Luminaire Operational Specifications

Source:	RGBW LED Array (x36 - 9 Red / 9 Green / 9 Blue / 9 White - all 600 mA)
Beam Angle:	10 Degrees
Light Output:	> 2,300 lumens
Color Temperature:	2700 - 6500K (user adjustable)
Input Voltage (AC):	100V to 240V (+/- 10%, auto-ranging)
Current (AC):	0.95 Amps (100V) / 0.40 Amps (240V)
Frequency:	50/60Hz
Control Protocols:	DMX512 (1990) / DMX512A (RDM) / On-Board Menu
Ambient Temperature:	-20 to 40 Degrees C (-4 to 104 Degrees F)
Humidity:	5%-95% Non condensing
Cooling:	Natural Convection
Weight:	15.0 lbs (6.8 kg) - Luminaire only (no accessories)
Housing:	Die Cast Aluminium with Powder Coating
Compliance:	CE Marked (International models)
IP Rating:	IP20

**Note:** Common model specifications shown. For specific model specifications, features, and accessories, refer to the product specification sheet for more details.

### 2. SL STRIP 400 RGBW LED Luminaire Dimensions

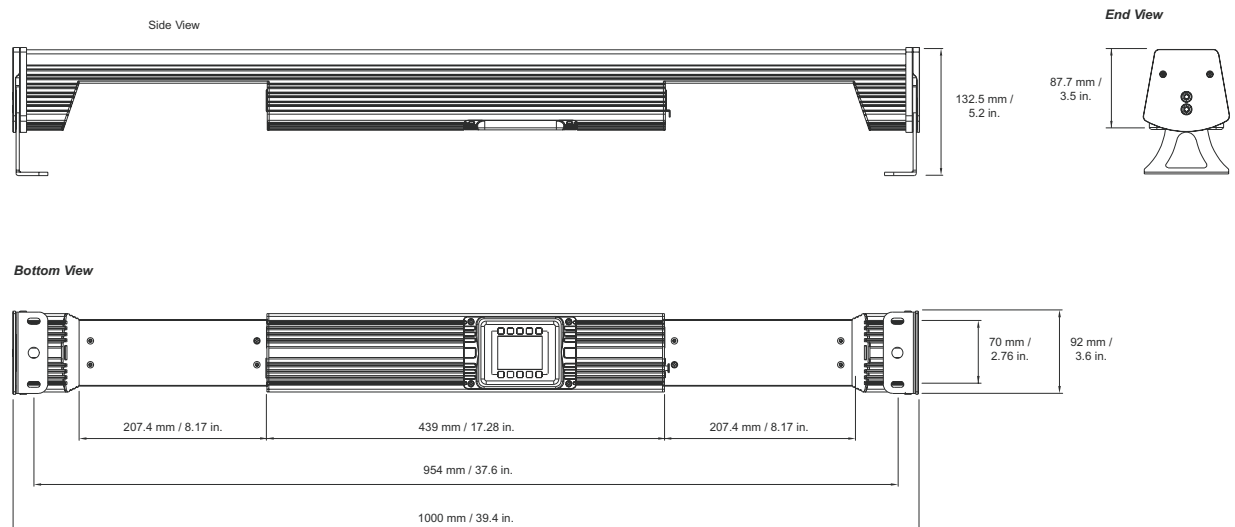

## Notes

# TECHNICAL SUPPORT

## GLOBAL 24HR TECHNICAL SUPPORT:

Call: +1 214 647 7880

[entertainment.service@signify.com](mailto:entertainment.service@signify.com)

## NORTH AMERICA SUPPORT:

Call: 877-VARI-LITE (877-827-4583)

[entertainment.service@signify.com](mailto:entertainment.service@signify.com)

## EUROPEAN CUSTOMER SERVICE CENTER:

Call: +31 (0) 543 542 531

[entertainment.europe@signify.com](mailto:entertainment.europe@signify.com)

© 2023 Signify Holding. All rights reserved. All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.