

### Features

- 24 Channel Memory Lighting Console
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snapshots of all 512 DMX channels
- VGA Monitor Port
- USB storage and keyboard support
- MIDI Notes & Show Control
- Lock Function
- LCD Display for stand-alone use
- Online Help in multiple languages
- Offline Editor (Phantom Jester)
- Remote triggers
- Upgradeable firmware
- External power supply
- 12/24 channels of control
- 24 Submasters
- 12 Auxillary Buttons



### Overview

Jester 12/24 is an ideal console for live and recorded playback control in smaller performance venues. With a rich but easy to use feature set, the Jester 12/24 delivers more than you would expect in a compact package.

The three operating modes feature control in preset, program or playback including using a traditional theatre playback stack. The Jester 12/24 is a fully functional memory console complimented with on-board LCD display and plug-in monitor port as standard.

With 12 auxiliary buttons used to trigger DMX devices such as scrollers, smoke machines or strobes, MIDI capabilities, a USB port to back up shows and even a DMX In port for snapshot/backup use, the Jester 12/24 is truly a powerful and affordable choice.

\*Monitor not included

MIDI USB Monitor

#### Quality you can trust

#### 40 Years of Lighting Passion

- |                           |                              |                              |
|---------------------------|------------------------------|------------------------------|
| ✓ 3 years warranty        | ✓ Real people to help you    | ✓ Multilingual training team |
| ✓ On-line training videos | ✓ Downloadable web resources | ✓ Support forum              |
| ✓ Free software upgrades  | ✓ ISO 9001:2008 Certified    |                              |

### Ordering Information

Jester 12/24 - Desk mount: 00-108-00

Flightcase Jester 12/24: 00-766-00

### Supplied Accessories


Power Supply

Operating Manual (on CD)

### Specifications

- Control Channels: Up to 512
- Channel Faders: 24
- Preset Master Faders: 2
- Fade Time Controls: 1 (Split Up/Down times can be programmed)
- Sequence Speed Control: 1
- Sequence Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 24
- Midi In/Thru
- VGA Monitor Port
- Audio Input
- Remote Input
- Storage and Keyboard Connections
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX512-A
- Dimensions: 90mm(H) x 452mm(W) x 278mm(D)
- Weight: 4.5Kg (10lb)
- Operating environment: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

### Dimensions

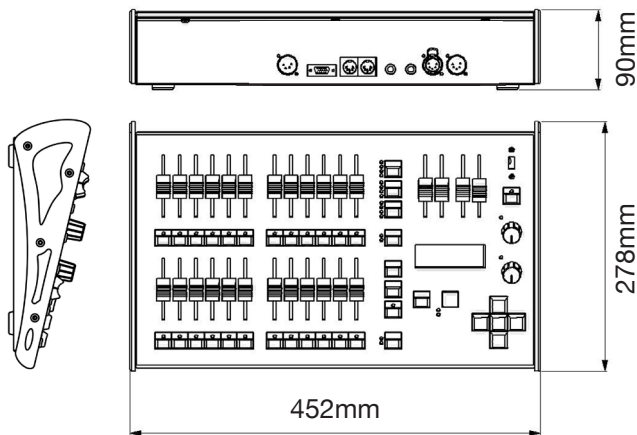

Voltage	100V	<input checked="" type="checkbox"/>	220 - 240V NON CE	<input checked="" type="checkbox"/>	Standards	
	110 - 127V	<input checked="" type="checkbox"/>	277V	<input type="checkbox"/>		
	230V CE	<input checked="" type="checkbox"/>	347V	<input type="checkbox"/>		

This product conforms to one or more of the above standards.  
Please contact your local Cooper Controls representative for further information.

Zero 88

Tel : +44 (0)1633 838088 Fax : +44 (0)1633 867880  
E-mail: [enquiries@zero88.com](mailto:enquiries@zero88.com) Web: [www.vari-lite.com](http://www.vari-lite.com)