

Jester 12/24

19" Rack Mount

24 Channel Rack Mount Lighting Console

Features

- 24 Channel Memory Lighting Console
- 19" Rack Mount
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snapshots of all 512 DMX channels
- VGA Monitor Port
- USB storage and keyboard support
- MIDI Notes & Show Control
- Lock Function
- LCD Display for stand-alone use
- Online Help in multiple languages
- Offline Editor (Phantom Jester)
- Remote triggers
- Upgradeable firmware
- External power supply
- 12/24 channels of control
- 24 Submasters
- 12 Auxillary Buttons



Overview

Jester 12/24 19" Rack Mount has been tailored specifically for mounting in 19" racks making this unit perfect for installation where space is at a premium. Users include TV and video studios, clubs, small rental and AV applications. The Jester 12/24 19" Rack Mount is simple to use and delivers great features in a very compact package.

The three operating modes feature control in preset, program or playback including using a traditional theatre playback stack. The Jester 12/24 19" Rack Mount is a fully functional memory console complimented with on-board LCD display and plug-in monitor port as standard.

With 12 auxiliary buttons used to trigger DMX devices such as scrollers, smoke machines or strobes, MIDI capabilities, a USB port to back up shows and even a DMX In port for snapshot/backup use, the Jester 12/24 19" Rack Mount is truly a powerful and affordable choice.

MIDI USB Monitor

Quality you can trust

40 Years of Lighting Passion

- | | | |
|---------------------------|------------------------------|------------------------------|
| ✓ 3 years warranty | ✓ Real people to help you | ✓ Multilingual training team |
| ✓ On-line training videos | ✓ Downloadable web resources | ✓ Support forum |
| ✓ Free software upgrades | ✓ ISO 9001:2008 Certified | |

Ordering Information

Jester 12/24 - 19" Rack Mount: 00-128-00

Flightcase Jester 12/24: 00-766-00

Supplied Accessories


Power Supply

Operating Manual (on CD)

Specifications

- Control Channels: Up to 512
- Channel Faders: 24
- Preset Master Faders: 2
- Fade Time Controls: 1 (Split Up/Down times can be programmed)
- Sequence Speed Control: 1
- Sequence Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 24
- Midi In/Thru
- VGA Monitor Port
- Audio Input
- Remote Input
- Storage and Keyboard Connections
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX-512 1990 Protocol
- Dimensions: 90mm(H) x 483mm(W) x 278mm(D)
- Weight: 4.5Kg (10lb)
- Operating environment: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

Dimensions

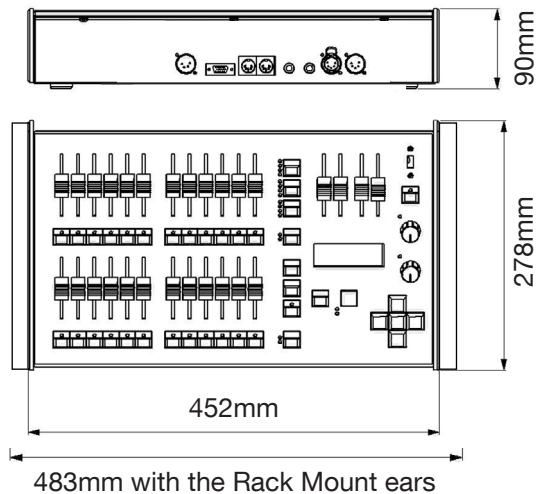

	Voltage	100V <input checked="" type="checkbox"/>	220 - 240V NON CE <input checked="" type="checkbox"/>	Standards 					
		110 - 127V <input checked="" type="checkbox"/>	277V <input type="checkbox"/>						
		230V CE <input checked="" type="checkbox"/>	347V <input type="checkbox"/>						

This product conforms to one or more of the above standards.
Please contact your local Cooper Controls representative for further information.

Zero 88

Tel : +44 (0)1633 838088 Fax : +44 (0)1633 867880
E-mail: enquiries@zero88.com Web: www.vari-lite.com