

# Automated lights

## **SL BEAM 500fx**

Pumping up the performance of the SL BEAM range, the Showline SL BEAM 500fx is a superb moving-head luminaire that delivers an exceptional output from its 37 RGBW LEDs. Just like its partner in this category, the SL BEAM 500fx is fast and quiet and extremely versatile.

The effective precision optical design allows the SL BEAM 500fx to function as a beam and as a wash luminaire. However, where the luminaire really stands out is through its individual pixel mapping and animation, together with a rotating front lens for multi-beam effects.

# Product data



## Features and benefits

- 15,500 lumens of output.
- Crisp tightly collimated beam.
- Powerful blended washes of color.
- Large aperture front lens with 37 fused optics.
- Create entrancing fluid lighting effects with the rotating lens and effects wheel.
- Configure remotely via RDM, or locally through the comprehensive Showline LCD menu system.
- Choice of DMX512-A control via 5 pin XLRs or over Ethernet.
- Pattern mode with 32 dynamic moving animations
- Two year limited warranty.


|                       |  |
|-----------------------|--|
| Source                | RGBW LED   |
| Qty of LED cells      | 37   |
| Lumen output (max.)   | 15,500   |
| Wattage               | 1200W  |
| Color temperature     | 2700-5800K   |
| CRI                   | >90  |
| Color mixing          | RGBW   |
| Beam angle            | 5-36°  |
| Pan / tilt            | 540° / 220°  |
| Controls              | DMX512-A / RDM, Art-Net™, master / slave                         |
| Pixel / zone control  | Pixel control  |
| DMX modes             | HSIC, simple 8-bit RGBW, 8-bit RGBW, 16-bit RGBW, pattern        |
| Dimming               | Electronic 8 and 16-bit  |
| Macro effects         | Pre-set filter colors, color chases, strobe and duration control |
| Accessories           | –  |
| Operating voltage     | 100-240VAC   |
| IP rating             | IP20   |
| Operating temperature | -20-40°C   |
| Construction          | Metal frame and engineering plastic covers                       |
| Finish                | Black  |
| Dimensions L x H x W  | 475 x 605 x 396mm (18.7 x 23.8 x 15.6in)                         |
| Hanging centers       | 620mm (24.4in)   |
| Weight                | 29.0kg (64.0lb)  |
| Warranty              | 2 years  |

# Product data

## Philips Showline SL BEAM 500fx

| Color temp | CRI | Wattage | Beam  | Overall dimensions<br>W x H x D             | Weight             | Order Code     |
|------------|-----|---------|-------|---|--------------------|----------------|
| RGBW LED   | >90 | 1200W   | 5-36° | 475 x 605 x 396mm<br>(18.7 x 23.8 x 15.6in) | 29.0kg<br>(64.0lb) | 88-095-6902-36 |

# Dimensional drawing

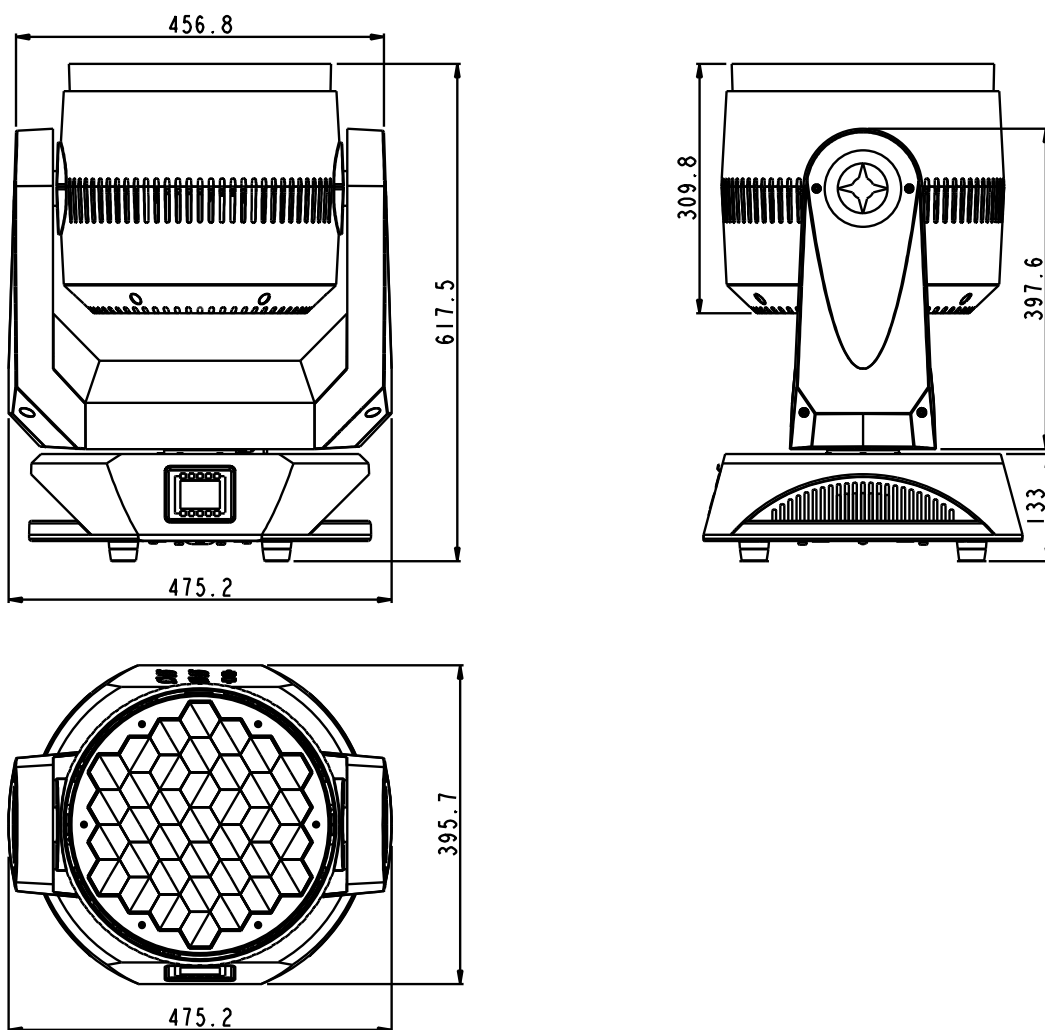



© Philips Lighting Holding B.V. 2017. All rights reserved. Philips reserves the right to make changes in specification and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

04/2017

Data subject to change. All measurements quoted primarily in millimeters.

[philips.com/showline](http://philips.com/showline)