## **Showline**







The SL NITRO 510 is a cutting-edge new LED based strobe luminaire that provides intense bursts of light and dynamic effects. The tightly packed array of over 1300 high power LEDs ensures maximum output and full-field, even distribution across 120°. The rugged construction, Showline standard LCD menu system, continuous-on operation and lower power consumption guarantee the SL NITRO 510 is the perfect strobe luminaire for any application.


A unique quick-connect systems allows SL NITRO 510 units to connect together easily top-to-bottom and side-by-side. In addition, the form factor of the SL NITRO 510 matches the SL BAR 520 so the two luminaries can be interconnected providing unlimited design possibilities.


Six unique zones of control allow ultimate flexibility while unique built in chases aid in creativity and simplicity. With over 68,000 lumens of output, the SL NITRO 510 rivals conventional strobes and retains dynamic looks whether washing a stage or pointing directly at an audience.

#### Features:

- Rugged Construction, IP20
- Physical similarity and connectivity with SL BAR 520
- Quick connections for linking fixtures end-to-end or top/bottom
- 6500 K color temperature
- Six independent zones of control
- Preprogrammed special effects
- Continuous blinder effect
- Built-in presets, effects and chases
- Multiple DMX modes for total control and easy retrofits
- On-board LCD Menu System for addressing and setup
- Remote configuration available via RDM
- PowerCon in and thru power connections
- 5-pin DMX-512A(RDM) in and thru connections
- Quiet temperature-controlled fan cooling
- Auto-ranging power supply (100-240 V, 50/60 Hz)

#### Drawing Diagram:

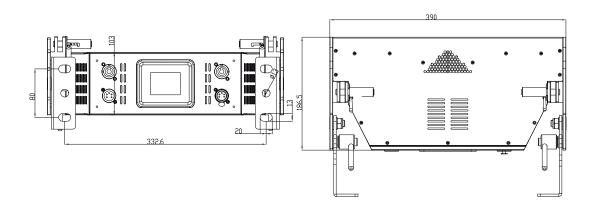



# **Showline**



### **Technical Specifications:**

Version: SL NITRO 510, IP20

Optics:

120 degree beam angle 1350 high power White SMD LEDs

DMX-512A(RDM) Local LCD control Master/slave

Modes:

"Classic" 1, 3, and 4 channel 16-bit 16-bit Zone Mapping

Features:

Variable strobe : 0 - 650 ms Strobe rate: 0 - 30 flashes/second

Blinder effect: Full on capability of nearly unlimited duration

without any loss in output

Special effects: Ramp up, ramp down, ramp up-down,

random flash, single flash, zone chases and shapes

**Physical:** 100 - 240VAC, 360W 390mm × 263mm × 103mm, 7Kg 16"× 11"× 4", 15.4 lbs CE, ETL, cTick

Luminance: >68,000 lumens





"Setting the new standard for strobe lighting"

### Ordering Information:

SLNITRO510

SL NITRO 510 LED Strobe IP20

Philips Group 2013. All rights reserved.

The Company reserves the right to make any variation in design or construction to the equipment described. E&OE. Philips Entertainment delivers fully integrated lighting solutions; from simple lamps to complete systems designed with the specfic needs of the entertainment and specialized display lighting markets. www.vari-lite.com