

SL-Bar-660 RGBW

▶ Photometric Data

Light source specifications

Optics: PMMA+ABS
 Beam angle: 60 degree
 Light distribution: symmetric direct illumination
 CRI: up to 90


Illuminance

DISTANCE	1m	2m	3m	5m
COLOR	Lux	Lux	Lux	Lux
Red	1830	457	203	73
Green	3441	860	382	138
Blue	520	130	58	21
6500K	4519	1130	502	181
RGBW	11522	2880	1280	461


Light output

COLOR	Total (lumens)	Power(watts)	Efficacy(lm/W)
Red	2322.9	122.1	19.1
Green	4428.6	130.5	33.9
Blue	660.8	97.1	6.8
6500K	5802.6	151.7	38.2
RGBW	14777.2	571.1	25.9


Full intensity in RGBW

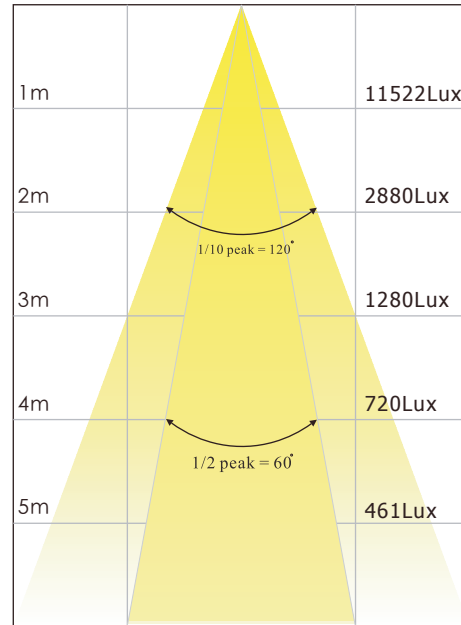

Light distribution

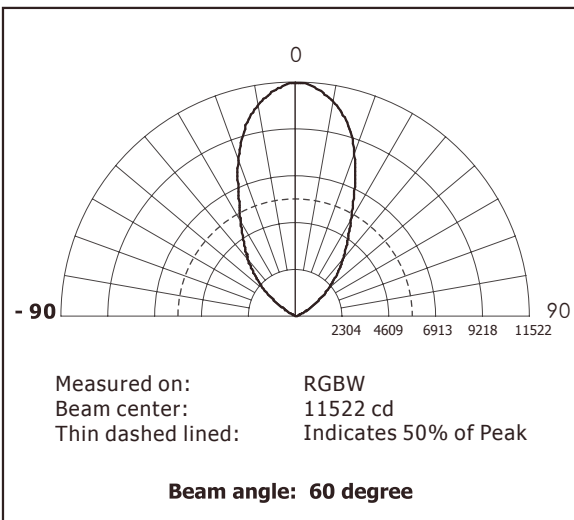

Isolux diagram

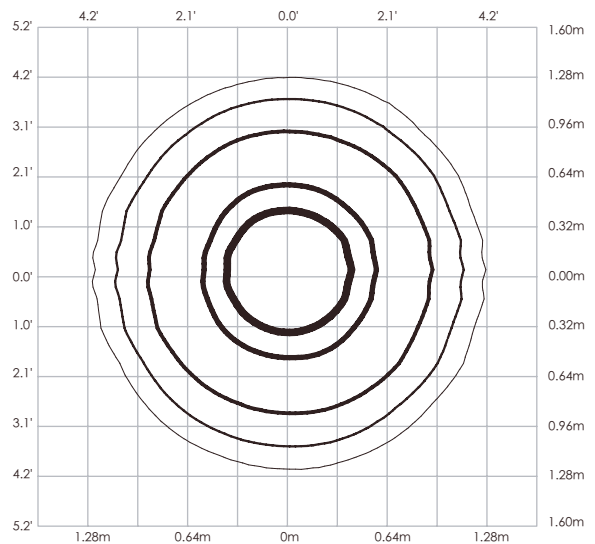

At 1m distance

- 3% 345.7 lx
- 5% 576.1 lx
- 10% 1152.2 lx
- 30% 3456.6 lx
- 50% 5761.0 lx