

Showline

SL STRIP 10 IP



The SL STRIP 10 IP is the ideal choice for outdoor entertainment applications, and wet environments. Ten cells of homogenized RGBW LEDs deliver a blended wash of colour, emulating the traditional halogen strip light effect, with reduced power consumption, lower heat output, and minimal maintenance.

Control each cell individually for maximum flexibility, or in groups for applications requiring simpler control. The SL STRIP 10 IP can be easily configured to suit your design requirements. Choose the appropriate dimming curve, utilize the in-built chase programs, and adjust the beam angle by inserting one of the optional holographic diffuser lenses.

With its rugged construction, internal power supply and simple operating system, the SL STRIP 10 IP is an ideal replacement for conventional MR-16 strip lights for all outdoor entertainment applications.

Showline

SL STRIP 10 IP

FEATURES


- Rugged construction
- 10 homogenized RGBW LEDs
- 8-bit DMX-512A operates as 16-bit smooth resolution
- On-board LCD menu system for addressing and setup
- Remote configuration available via RDM
- DMX-512A (RDM) in and thru connections - 1m cable tails
- In and thru power connections - 1m cable tails

BENEFITS

- Built-in preset and chase program
- Silent passive cooling
- Harmonize Color Calibration technology

HARMONIZE COLOR CALIBRATION TECHNOLOGY

At the heart of all Showline products is Harmonize Calibration technology. Harmonize is a proprietary, advanced LED color matching system, consisting of 3 correction modules: RGB, RGBW and Cool White/Warm White. Every Showline fixture undergoes rigorous testing to provide you with consistent control of color and intensity as well as output of the highest quality.

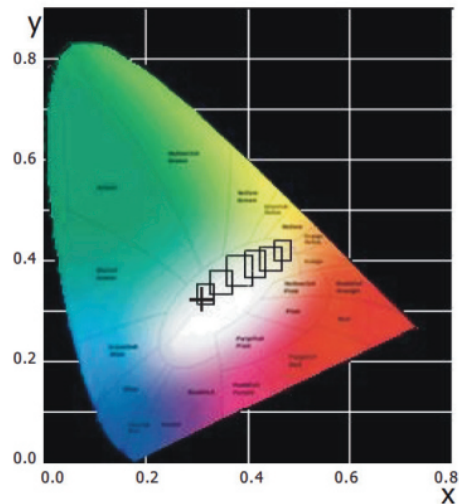

Showline

SL STRIP 10 IP

SOURCE

| | |
|---------|-----------------------------------|
| Type | 10 units of 4 in IRGBW LED engine |
| Wattage | 150W |

OPTICAL PERFORMANCE

| | |
|------------------------|-----------------------------------|
| Lumen output (max) | 2240 |
| CRI/CQS | >90 (RGBW) |
| Lens size | 15, 25, or 11 x 38° diffuser lens |
| Mode - 8-, 16-bit RGBW | 1, 2, 5, 10 pixels |

BEAM

| | |
|------------|----------------------|
| Beam angle | 6° native beam angle |
|------------|----------------------|

POWER

| | |
|-------------------|--------------|
| Operating voltage | 110 - 240VAC |
| Max wattage | 500W |

DATA CONNECTIONS

| | |
|-----|-------------|
| DMX | In and thru |
|-----|-------------|

DATA PROTOCOLS

| | |
|-----------|---------------|
| DMX (RDM) | DMX-512A(RDM) |
|-----------|---------------|

PHYSICALS

| | |
|--------------|-----------------------------|
| IP rating | IP65 |
| Finish | Black |
| Construction | Metal frame, plastic covers |

ENVIRONMENT

| | °C | °F |
|-----------------------|--------|--------|
| Operating temperature | -10-45 | 14-113 |
| Operating humidity | 33-45% | |

DIMENSIONS

| | mm | in |
|-----------|--------------------|------------------|
| H x W x L | 1076.6 x 120 x 201 | 42.4 x 4.7 x 7.9 |

WEIGHT


| | kg | lb |
|------------|-----|------|
| Net weight | 7.5 | 16.5 |

WARRANTY & APPROBATION

| | |
|--------------|---------|
| Warranty | 2 years |
| Approbations | CE |

Showline

SL STRIP 10 IP

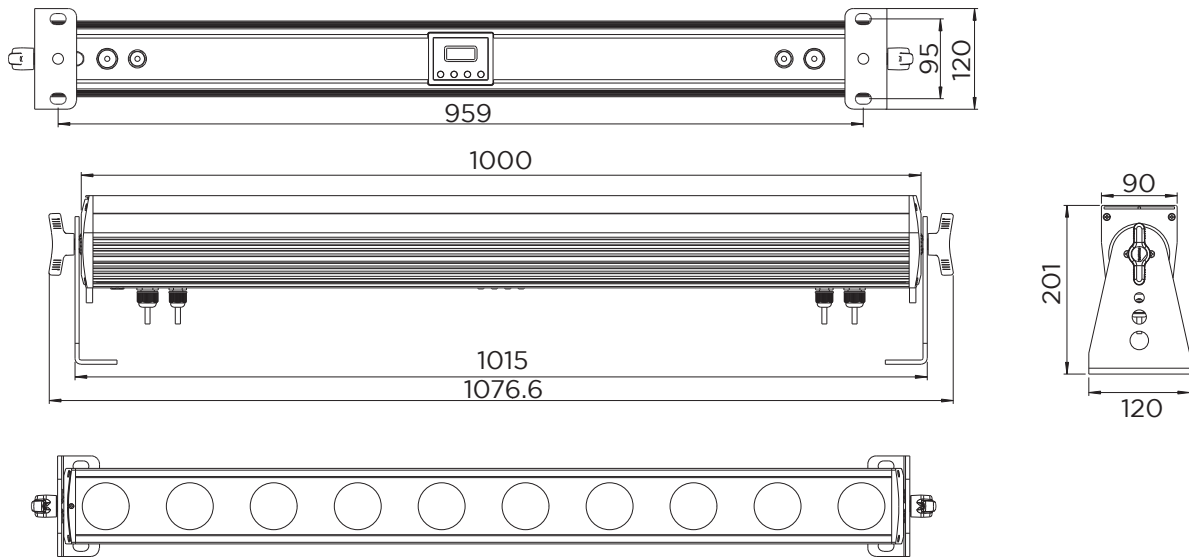

PRODUCT NAME

ORDER CODE

SL Strip 10 IP RGBW complete with lens shaping kit, DMX IP65 rated captive power and data cables (UL3)

88-095-6472-36
SLSTRIP10IP

SL Strip 10 IP RGBW complete with lens shaping kit, DMX IP65 rated captive power and data cables (bare-end)

88-095-5822-36

© 2018 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: 88-095-6472-36-100-v00