

# Showline

## SL WASH 350

# PHILIPS



The SL WASH 350 LED Luminaire delivers an extremely bright homogenous beam with a large zoom range. The luminaire's 19 RGBW 15-watt LEDs deliver over 5,800 lumens of output and an extremely wide color palette. The large motorized zoom range of 8° to 40° provides designers with the freedom to use the SL WASH 350 as a special or as a wash luminaire.


Choose the appropriate DMX mode to meet your control requirements. Utilize the built in color and effect presets for speed and simplicity, or take direct control of the three LED zones and create your own unique designs on the front of the luminaire.

As with every Showline luminaire, the SL WASH 350 utilizes the Harmonize Color Calibration system. This revolutionary process ensures color matching not only between luminaires, but also between individual pixels of each and every luminaire. A removable snoot provides masking control when required. Seamless color changes, powerful output, a wide zoom range and creative programming possibilities enable the SL WASH 350 to fit into a wide range of lighting applications.

### Features :

- Rugged Construction
- Philips Lumileds RGBW LED's for exceptional output and color
- Up to 3 zones of individual LED control
- Built-in color presets, effects and chases
- HSIC (Hue - Saturation - Intensity - Color temperature) operation mode
- 8 or 16-bit DMX-512A operation for smooth stepless fades
- On-board LCD Menu System for addressing and setup
- Remote configuration available via RDM
- Removable snoot
- Supplied with fast fit hanging brackets
- PowerCon in and thru power connections
- 5-pin DMX-512A(RDM) in and thru connections

### Drawing Diagram :

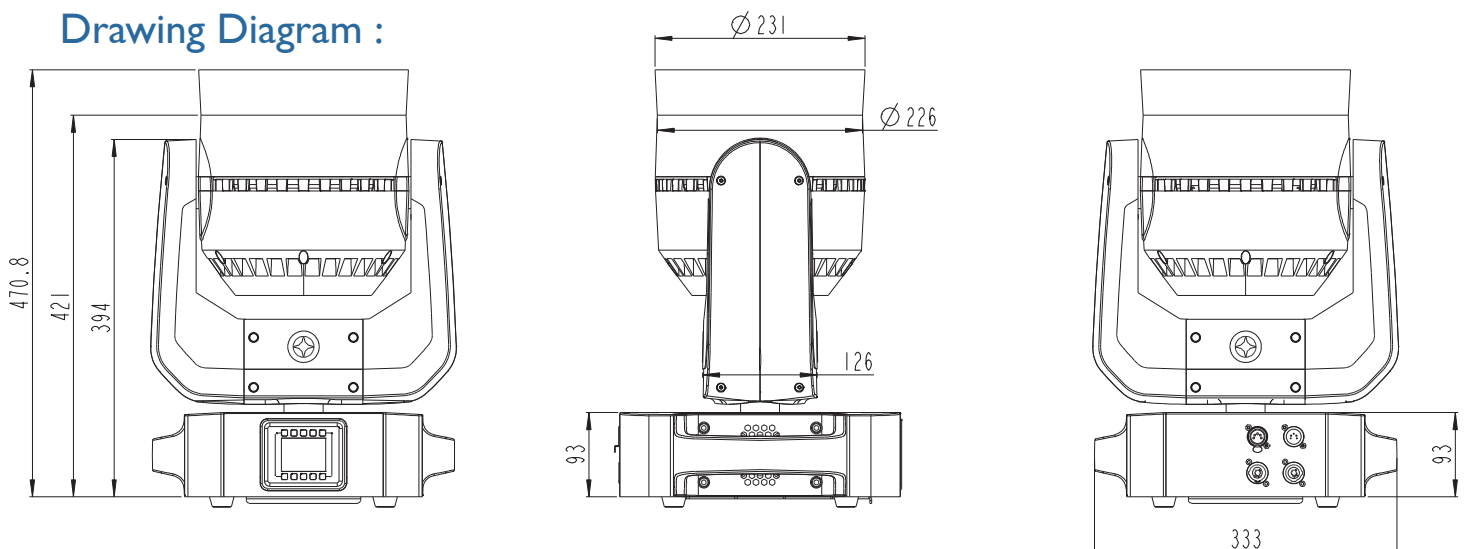

## Technical Specifications :

**Version:**  
SL WASH 350 RGBW, IP20

**Optics:**  
8 - 40 degree zoom  
19 high power LEDs  
CCT 2700K - 10,000K(user adjustable)

**Controls:**  
DMX-512A(RDM)  
Local LCD control  
Master/slave

**Features:**  
Color Gel filter preset  
Chase - Strobe + Duration Effect Engine  
Up to 3 zones of individual control  
Zone effects  
LED & Tungsten Curves selection  
Pan/Tilt shape Effect Engine

**Modes:**  
HSIC  
8 bit RGBW  
16 bit RGBW

**Physical:**  
100-240VAC, 360W  
471mm x 333mm x 333mm (18.5" x 13" x 13")  
15.6kg (34.4 lbs)  
CE

**Luminance:**  
>5800 lumens (full On)  
CRI/CQS:  
>90 (RGBW)


## Ordering Information :

SLWASH350

SL WASH 350 RGBW, IP20

## Harmonize Color Calibration Technology

At the heart of all Showline products is Philips Harmonize Calibration technology. Harmonize is a proprietary, advanced LED color matching system, consisting of 3 correction modules: RGB, RGBW and Cool White/Warm White. Every Showline fixture undergoes rigorous testing to provide you with consistent control of color and intensity as well as output of the highest quality.

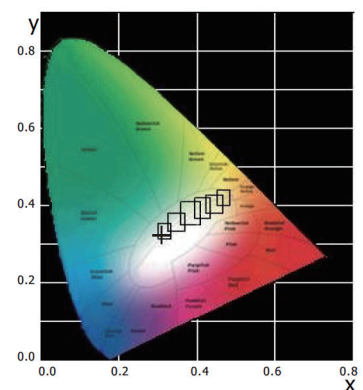

*Philips Group 2014. All rights reserved.*

*The Company reserves the right to make any variation in design or construction to the equipment described. E&OE. Philips Entertainment delivers fully integrated lighting solutions; from simple lamps to complete systems designed with the specific needs of the entertainment and specialized display lighting markets.*

Philips Entertainment U.S.  
10911 Petal Street  
Dallas, TX 75238  
Tel: +1 214647 7880  
Fax: +1 214647 8030

Philips Entertainment Lighting Asia Limited  
Unit C, 14/F, Roxy Industry Centre  
No. 41 - 49 Kwai Cheong Road  
Kwai Chung, N.T. Hong Kong  
Tel: +852 27969786  
Fax: +852 27986546

Philips Entertainment Group Europe  
Rondweg Zuid 85  
Winterswijk 7102 JD Netherlands  
Tel: +31 543-542343  
Fax: +31 53 4500425

Philips Entertainment New Zealand  
19 - 21 Kawana Street, Northcote  
Auckland 0627, New Zealand  
Tel: +64 9481 0100  
Fax: +64 9481 0101